


DOOR FINGERS 2800

Contact fingers for Faraday cage doors and lids for shielded enclosures



EMI Finger stock, fingerstrips & spring contacts for shielded Faraday cage doors, electrical conductive doors and lids.

DOOR FINGERS 2801

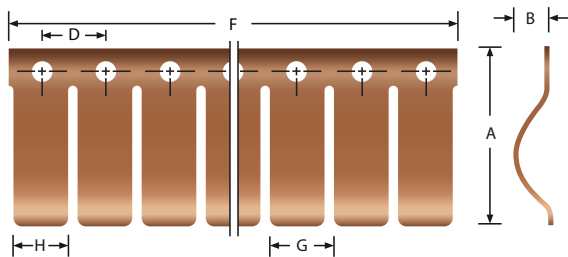

Part nr.	A	B	∅	D	F	G	H	Compression force N
2801-01	27.7	6.9	3.6	9.5	504	9.5	8.5	
2801-01R	27.7	6.9	3.6	9.5	7600	9.5	8.5	
2801-02	40.3	10.9	3.6	12.7	508	12.7	11.7	
2801-03	42.4	10.9	3.6	12.7	504	12.7	11.7	25% 240 N/m 50% 460 N/m
2801-03R	42.4	10.9	3.6	12.7	7620	12.7	11.7	25% 240 N/m 50% 460 N/m


Material thickness 0.18mm, material beryllium copper

ORDER EXAMPLE

Part number

Specify the part number that you need from the table


DOOR FINGERS 2802

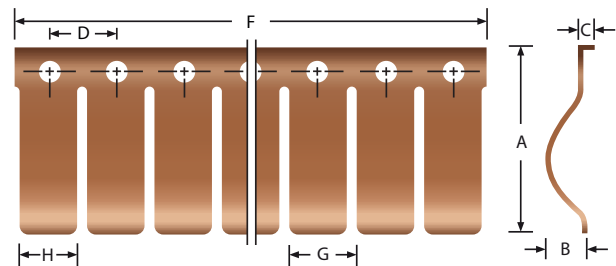

Part nr.	A	B	C	∅	D	F	G	H	Material thickness
2802-01	25.8	6.9	2.0	3.6	9.5	503	9.5	8.5	0.13mm

Material: Beryllium copper

DOOR FINGERS 2803

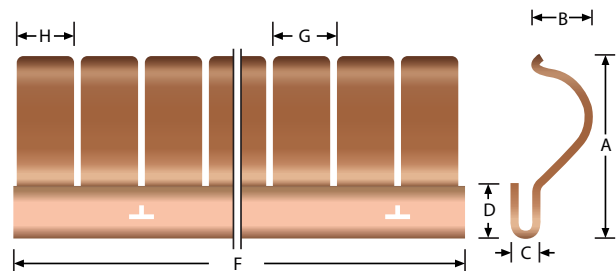

Part nr.	A	B	C	D	F	G	H	Material thickness
2803-01	27.0	6.9	2.0	7.8	494	9.5	8.5	0.13mm

Material: Beryllium copper

*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.