



4702 - Amucor tape with standard adhesive

Product Description

Amucor tape with standard adhesive 4702 consists of polyester film-laminated aluminum foil and pressure-sensitive acrylic adhesive.

- PET-laminated aluminum foil backing
- Acrylic adhesive
- Supplied on a removable liner for easy handling and diecutting

Amucor tape with standard adhesive 4702 is available in standard and custom widths and lengths.

Standard length is 16.5 meters.

- Widths from 6mm to 500mm
- Longer lengths up to several times normal length, dependent upon width.

Applications

Amucor tape with standard adhesive 4702 is typically used for applications requiring non-electrical conductivity from the application substrate to the backing and needing insulation on top of the foil backing. Common uses include grounding and EMI shielding in equipment, components, shielded rooms, etc.

Shielding Effectiveness


Many factors determine the true shielding effectiveness of a shielding tape, including type and thickness of foil, adhesive type, intimacy of contact, smoothness of application surface, strength and frequency of the EMI signal, etc. However, using standard tests and fixtures, it is possible to determine a value for the attenuation

Typical Properties

Properties	Typical Value
Type of backing	PET-laminated aluminum foil backing
Type of adhesive	Acrylic adhesive
Total thickness (backing plus adhesive)	0.055 ± 0.005 mm
Breaking strength ¹	6.5 kgf/25 mm
Elongation	40%
Adhesion strength ¹	500 gf/25 mm
Shielding effectiveness ²	Refer to attenuation chart
Temperature range	- 55°C till +120°C

* Footnotes: 1. Test method ASTM-D-1000
2. ASTM-D-4935 Test Method

Shielding Effectiveness (Test method: ASTM-D-4935)

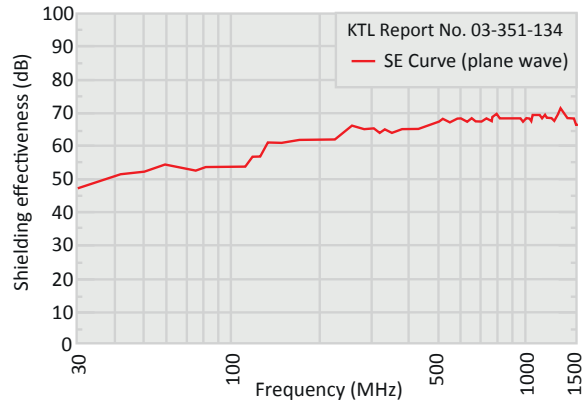

Important Notice

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Warranty; Limited Remedy; Limited Liability. This product will be free from defects in material and manufacture as of the date of purchase.

HOLLAND SHIELDING SYSTEMS MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

If this product is defective within the warranty period stated above, your exclusive remedy shall be, at Holland Shielding Systems option, to replace or repair the product or refund the purchase price of the product. Except where prohibited by law, Holland Shielding Systems will not be liable for any loss or damage arising from this product, whether direct, Indirect, special, Incidental or consequential regardless of the legal theory asserted.