


MOUNTING TAPE 3205



A double-sided self-adhesive transfer tape for mounting purposes. This tape can be applied much more quickly than a conductive glue and it is easy to position it very accurately. No time is required for curing (for the pressure-sensitive version). For lower resistance and/or to fill in gaps on a rough surface, we recommend Shieldokit electrically conductive two-component adhesive

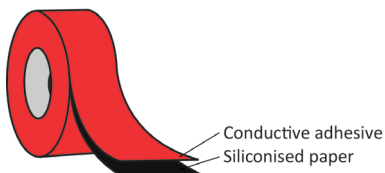

TECHNICAL SPECIFICATION

Part number (with conductive adhesive)	3205
Part number (with standard adhesive)	-
Construction	
Color	Transparent
Base material	Silicone release paper
Total thickness	0.050 mm
Adhesive	Electrically conductive acrylic
Adhesive performance	5,5 N/cm
Temperature resistance	Standard -20°C up to +130°C Short term up to 180°C
Electrical resistance	0.01Ω/□
Shelf life	6 months from date of delivery
Storage	Cool and dry in original packaging at 23°C +/- 2°C and 50% Relative Humidity +/- 2% RH
Standard roll widths (mm)	10, 25, 50, 100 Other width on request
Roll lengths	Min. 16.5m (standard) Other roll length on request

These values are measured under laboratory conditions. In other situations results may differ. Please read our Guarantee.