



PCB CLIPS

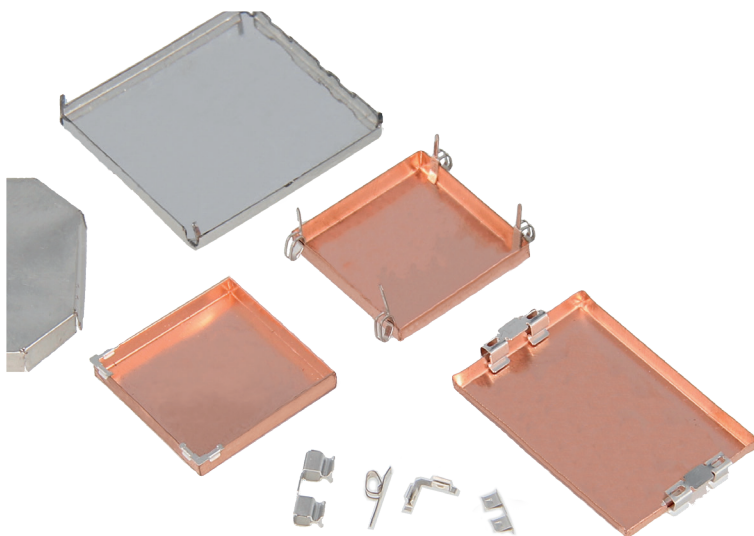

LARGE CLIP (FOR 1500 SERIES) LC

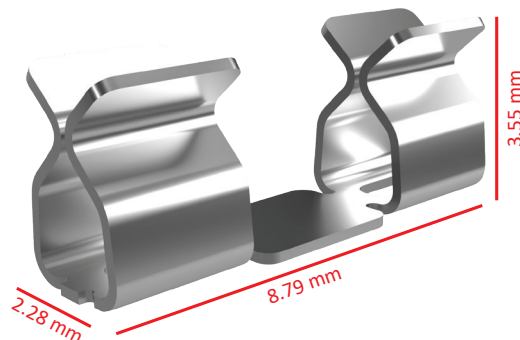

INTRODUCTION 1500 CLIPS

The 1500 series PCB shielding clips are developed to fix a PCB shielding can onto the PCB. There are SMD and through hole mounting versions available. Easy to attach the PCB shielding into the clips and remove for maintenance.

FEATURES

- Enhance your productivity by SMT process
- Seamless corners for ultra-high EMI shielding effect
- Reduce shield clip numbers to lower the costs

ADVANTAGES

- Mass production
- Easy insertion and removal
- Convenient for re-work
- Also available in 90° version for seamless corners and high shielding effectiveness
- For mobile phones, MP3, PDA, navigation systems, internet repeaters, walkie talkies and much more...

ORDER EXAMPLE

Part number

LC : Large clip
MC : Medium clip
P : Small pin
TC : Tiny clip
TCC : Tiny corner clip
UTC : Ultra tiny clip
UUTC : Ultra tiny corner clip



The large clip is a metal clip designed to attach PCB shielding cans/screening covers from our 1500 series.

This clip is to be mounted onto the surface of a PCB (SMT) and offers a fast solution for assembling RFI/EMI-shielding cans to PCB's. This clip eliminates the need for through holes and post re-flow operations on the PCB. For best performance, the shielding clip should be mounted on the PCB ground pattern. This can be done by hand or by vacuum pick-up nozzle (automated).

This clip offers a great opportunity for tuning and re-work after the assembly of the screening cover. The thickness of the screening cover can be up to 0.3mm. The clip can be supplied on reels of 1.900 pieces.


TECHNICAL SPECIFICATIONS

Material	Stainless steel
Finish	Tin plated
Packaging format	Tape & reel or Pieces
Reel quantity	1500 on a Ø330mm reel
Contact resistance	20 milli-ohms max
Shield thickness	Up to 0.30mm
Insertion force (max)	3.0N
Withdrawal force (max)	1.0N

These values are measured under laboratory conditions.
 In other situations results may differ. Please read our Guarantee.



MEDIUM CLIP (FOR 1500 SERIES) MC

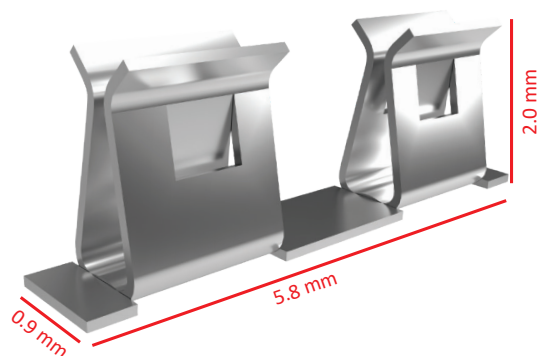

This clip is to be mounted onto the surface of a PCB (SMT) and offers a fast solution for assembling RFI/EMI-shielding cans to PCB's. This clip eliminates the need for through holes and post re-flow operations on the PCB. For best performance, the shielding clip should be mounted on the PCB ground pattern. This can be done by hand or by vacuum pick-up nozzle (automated).


This clip offers a great opportunity for tuning and re-work after the assembly of the screening cover. The thickness of the screening cover can be in the range of 0.12 to 0.23mm. The clip can be supplied on reels of 5.000 pieces.

The Medium clip takes up 40% less space than the Large clip.

TECHNICAL SPECIFICATIONS

Material	Stainless steel
Finish	Tin plated
Packaging format	Tape & reel or pieces
Reel quantity	5.000 pieces on a Ø330mm reel
Contact resistance	40 milli-ohms max
Shield thickness	0.12 – 0.23mm
Insertion force (max)	5.0N (0.17mm shield)
Withdrawal force (max)	0.35N
These values are measured under laboratory conditions. In other situations results may differ. Please read our Guarantee.	

SMALL PIN (FOR 1500 SERIES) P

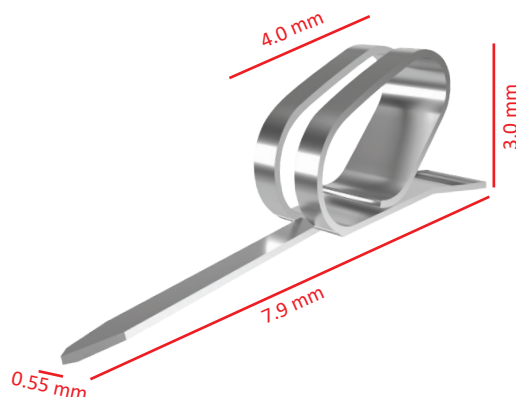

The Small pin is used to mount PCB screening cans and PCB shielding covers from our 1500 series PCB shielding cans onto your printed circuit board. This pin is designed to be placed through the surface of the PCB and offers a fast solution for assembling RFI/EMI shields to PCB's. The clip needs through holes and post re-flow operations on the PCB. This clip with a tinned pin can be soldered into the PCB at any available place around the screening cover.

ADVANTAGES

Thanks to the large clamping range, the pin does not have to be positioned with great precision. The recommended distance between the pins depends on the frequency that is to be shielded and the size of the PCB shielding can. For advice please consult our engineers.


TECHNICAL SPECIFICATIONS

Material	Phosphor bronze
Finish	Ni, Sn
Packaging format	Tube packing
Packaging quantity	40 pieces
Contact resistance	20mΩ max
Insulation resistance	5000MΩ min
Current rating	1A
Operating temperature	Between -25°C and +85°C
These values are measured under laboratory conditions. In other situations results may differ. Please read our Guarantee.	



pins & clips can be delivered on reel

TINY CLIP (FOR 1500 SERIES) TC

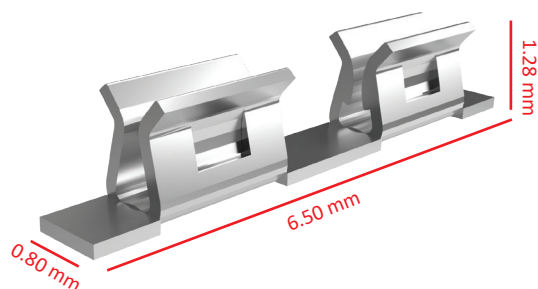

This clip is to be mounted onto the surface of a PCB (SMT) and offers a fast solution for assembling RFI/EMI-shielding cans to PCB's. This clip eliminates the need for through holes and post re-flow operations on the PCB. For best performance, the shielding clip should be mounted on the PCB ground pattern. This can be done by hand or by vacuum pick-up nozzle (automated).

This clip offers a great opportunity for tuning and re-work after the assembly of the screening cover. The thickness of the screening cover can be in the range of 0.18 to 0.25mm. The clip can be supplied on reels of 15.000 pieces.


Please note: The tiny clip takes up 25% less space than the medium clip.

TECHNICAL SPECIFICATIONS

Material	Stainless steel
Plating	Tin plated
Material thickness	0.15mm
Thickness of shielding can	0.18- 0.25mm
Operating temperature	-40 °C ~ 200 °C
Resistance	Max 0.05 ohms
Solder ability	More than 50%
Insertion force	Max. 1.0kgf at T=0.2mm
Removal force	Min. 0.2kgf at T=0.2mm
Number of repetitions insertion	Max 25 times
Environment	Eu-RoHS compliant, Pb & halogen-free
Thickness of solder cream (recommended)	0.06mm ~ 0.12mm
Quantity/reel	15.000
Finish	Tin
Packaging format	Reel and pieces

These values are measured under laboratory conditions. In other situations results may differ. Please read our Guarantee.

TINY CORNER CLIP (FOR 1500 SERIES) TCC

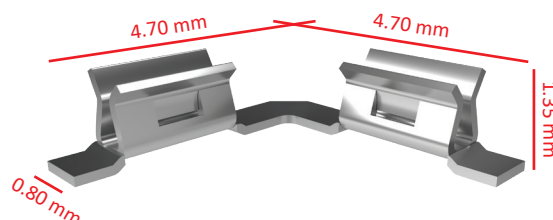

This clip is to be mounted onto the surface of a PCB (SMT) and offers a fast solution for assembling RFI/EMI-shielding cans to PCB's. This clip eliminates the need for through holes and post re-flow operations on the PCB. For best performance, the shielding clip should be mounted on the PCB ground pattern. This can be done by hand or by vacuum pick-up nozzle (automated).

This clip offers a great opportunity for tuning and re-work after the assembly of the screening cover. The thickness of the screening cover can be in the range of 0.18 to 0.25mm. The clip can be supplied on reels of 6.000 pieces.

The outer wing of the Tiny corner clip is higher than the inner wing to facilitate insertion of the shielding can.


TECHNICAL SPECIFICATIONS

Material	Stainless steel
Plating	Tin plated
Material thickness	0.15mm
Thickness of shielding can	0.18- 0.25mm
Operating temperature	-40 °C ~ 200 °C
Resistance	Max 0.05 ohms
Solder ability	More than 50%
Insertion force	Max. 1.0kgf at T=0.2mm
Removal force	Min. 0.2kgf at T=0.2mm
Number of insertion repetitions	Max 25 times
Environment	Eu-RoHS compliant, Pb & halogen-free
Thickness of soldering paste (recommended)	0.06mm ~ 0.12mm
Quantity/reel	6.000
Finish	Tin
Packaging format	Reel and pieces

These values are measured under laboratory conditions. In other situations results may differ. Please read our Guarantee.



ULTRA TINY CLIP (FOR 1500 SERIES) UTC

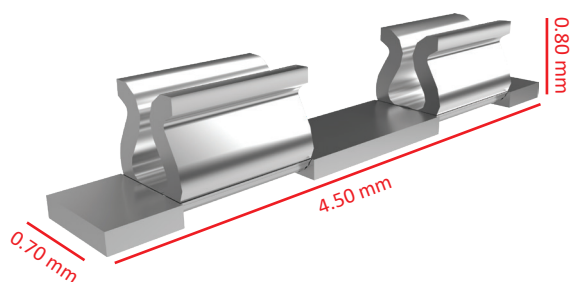

This clip is to be mounted onto the surface of a PCB (SMT) and offers a fast solution for assembling RFI/EMI-shielding cans to PCB's. This clip eliminates the need for through holes and post re-flow operations on the PCB. For best performance, the shielding clip should be mounted on the PCB ground pattern. This can be done by hand or by vacuum pick-up nozzle (automated).

This clip offers a great opportunity for tuning and re-work after the assembly of the screening cover. Thickness of the screening cover can be up to 0.12mm. The clip can be supplied on reels of 20.000 pieces. The Ultra tiny clip takes up 35% less space than the medium clip

TECHNICAL SPECIFICATIONS


Material	Stainless steel
Plating	Tin plated
Material thickness	0.15mm
Thickness of shielding can	Up to 0.12mm
Operating temperature	-40 °C ~ 200 °C
Resistance	Max 0.05 ohms
Solder ability	More than 50%
Insertion force	Max. 1.0kgf at T=0.2mm
Removal force	Min. 0.2kgf at T=0.2mm
Number of insertion repetitions	Max 25 times
Environment	Eu-RoHS compliant, Pb & halogen-free
Thickness of soldering paste (recommended)	0.06mm ~ 0.12mm
Quantity/reel	20.000
Finish	Tin
Packaging format	Reel and pieces

These values are measured under laboratory conditions.
In other situations results may differ. Please read our Guarantee.

*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

ULTRA TINY CORNER CLIP (FOR 1500 SERIES) UTCC

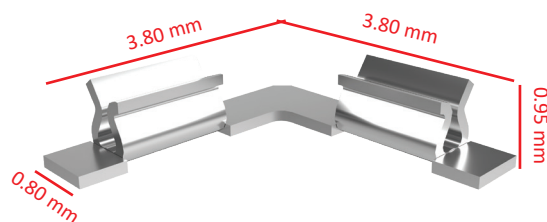

This clip is designed to be mounted onto the surface of a PCB (SMT) and offers a fast solution for assembling RFI/EMI-shielding cans to PCB's. This clip eliminates the need for through holes and post re-flow operations on the PCB. For best performance, the shielding clip should be mounted on the PCB ground pattern. This can be done by hand or by vacuum pick-up nozzle (automated).

This clip offers a great opportunity for tuning and re-work after the assembly of the screening cover. Thickness of the screening cover can be up to 0.12mm. The clip can be supplied on reels of 6.000 pieces.

TECHNICAL SPECIFICATIONS

Material	Stainless steel
Plating	Tin plated
Material thickness	0.15mm
Thickness of shielding can	0.12mm
Operating temperature	-40 °C ~ 200 °C
Resistance	Max 0.05 ohms
Solder ability	More than 50%
Insertion force	Max. 1.0kgf at T=0.15mm
Removal force	Min. 0.2kgf at T=0.15mm
Number of insertion repetitions	Max 25 times
Environment	Eu-RoHS compliant, Pb & halogen-free
Thickness of soldering paste (recommended)	0.06mm ~ 0.1mm
Quantity/reel	6.000
Finish	Tin
Packaging format	Reel and pieces

These values are measured under laboratory conditions.
In other situations results may differ. Please read our Guarantee.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.