


# CLIP-ON MOUNTING FINGERSTRIPS 2100

This simple clamping system is suitable for sealing gaps between an EMI/RFI-shielded door and its door frame and similar applications

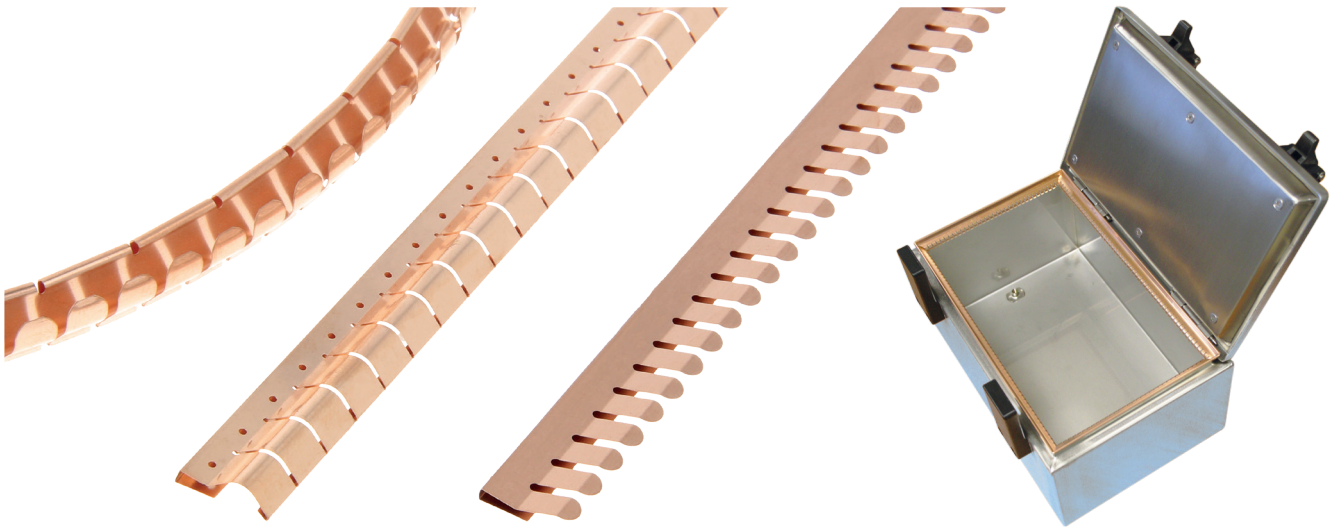


This series made from beryllium copper are designed for use where high temperature or other design considerations preclude the use of adhesive-mounted gasketing.

These Fingerstrips provide the same shielding characteristics and effectiveness as the 2300 series Stick-on mounting Fingerstrips.


2100 series Clip-on mounting fingerstrips offer shielding effectiveness >100dB for 100 MHz plane wave. The contact edge of this Fingerstrip series expands. The Fingerstrip has a low to high deflection (see technical drawings). For applications where a small dynamic range is required and a spring clip mounting is preferred. Fingerstrips from this series are easy to mount by simply Clip-on or clip over the edge where it is to be attached through pressing / sliding.

## CLIP-ON 2101

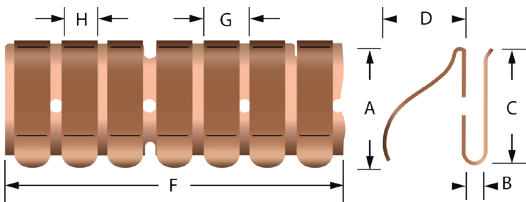


Part nr.	A	B	D	F	G	H	Material thickness
2101-01	9.5	1.5	5.2	406	6.4	5.3	0.13mm
2101-02	9.5	1.5	6.9	406	6.4	5.3	0.13mm
2101-03	9.5	1.5	5.1	610	6.4	5.3	0.13mm
2101-04	9.5	1.5	7.9	406	6.4	5.3	0.13mm
2101-05	9.5	1.5	6.9	610	6.4	5.3	0.13mm
2101-05R	9.5	1.5	6.9	7600	6.4	5.3	0.13mm

## CLIP-ON 2102

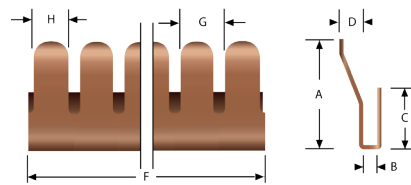

Part nr.	A	B	C	D	F	G	H	Material thickness
2102-01	11.4	1.0	6.9	2.5	407	4.8	3.6	0.1mm
2102-02	11.4	1.5	6.4	2.5	460	4.8	3.6	0.1mm
2102-03	11.4	2.0	5.8	2.5	407	4.8	3.6	0.1mm


## CLIP-ON 2103

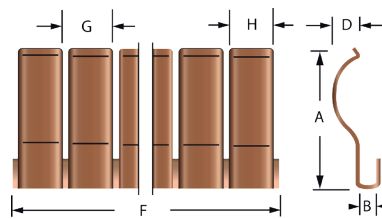

Part nr.	A	B	C	D	F	G	H	Material thickness	Compression force N
2103-01	27.0	2.0	7.8	6.9	494	9.5	8.5	0.13mm	
2103-02	27.7	2.3	6.6	6.6	457	9.5	8.7	0.13mm	25% 240 N/m 50% 630 N/m
2103-03	27.7	3.2	6.6	6.6	457	9.5	8.7	0.13mm	25% 240 N/m 50% 630 N/m


## » CLIP-ON MOUNTING FINGERSTRIPS 2100

### CLIP-ON 2104

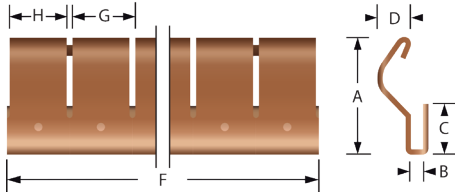


Part nr.	A	B	C	D	F	G	H	Material thickness
2104-01	11.7	1.0	6.1	3.0	457	6.4	5.9	0.08mm
2104-02	11.7	1.5	5.6	3.0	457	6.4	5.9	0.08mm
2104-03	11.7	2.0	5.1	3.0	457	6.4	5.9	0.08mm
2104-04	19.3	1.0	7.4	6.4	456	9.5	9.0	0.08mm
2104-05	19.3	1.5	6.9	6.4	456	9.5	9.0	0.08mm
2104-06	19.3	2.0	6.4	6.4	456	9.5	9.0	0.08mm
2104-07	19.3	3.0	5.3	3.5	456	9.5	9.0	0.08mm
2104-09	10.7	1.0	6.6	3.1	406	6.4	5.7	0.08mm
2104-10	10.7	1.5	6.6	3.1	406	6.4	5.7	0.08mm
2104-11	16.3	1.5	4.5	5.6	457	9.5	8.7	0.08mm


### CLIP-ON 2105

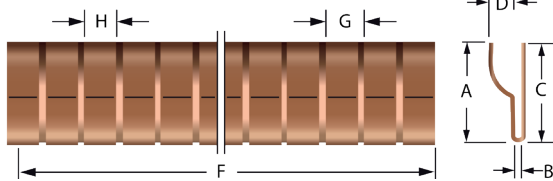


2105-02 to 2105-04, 2105-21

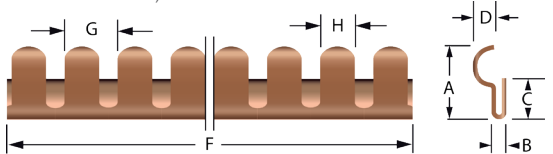


2105-06 to 2105-08

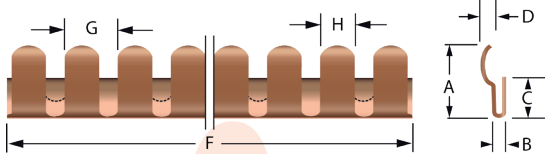

2105-09 to 2105-10

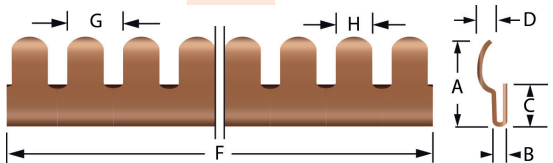


2105-11 to 2105-14, 2105-20, 2105-24 to 2105-28

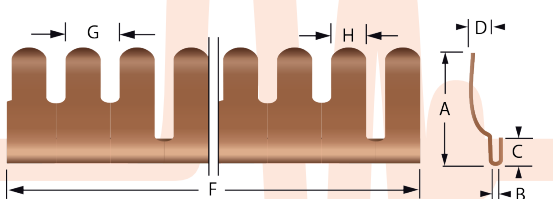

2105-16 to 2105-17

Part nr.	A	B	C	D	F	G	H	Material thickness
2105-02	6.8	1.0	7.1	2.5	409	6.4	5.6	0.15mm
2105-03	6.7	1.0	7.0	2.3	406	6.4	5.6	0.15mm
2105-04	6.6	1.0	7.1	1.6	409	6.4	5.6	0.15mm
2105-06	7.9	0.8	4.8	2.9	407	4.8	3.6	0.13mm
2105-07	7.9	1.0	7.8	2.9	407	4.8	3.6	0.13mm
2105-08	7.9	1.5	4.8	4.0	406	4.6	3.4	0.13mm
2105-09	7.9	1.3	4.8	1.3	406	4.6	3.4	0.13mm
2105-10	7.9	1.5	4.8	2.9	407	4.8	3.6	0.13mm
2105-11	10.8	0.8	4.9	3.5	407	4.8	3.6	0.13mm
2105-12	10.5	1.5	4.4	3.5	407	4.8	3.6	0.13mm
2105-13	10.7	1.0	4.8	2.3	406	4.8	3.6	0.13mm
2105-14	10.7	1.3	4.8	2.3	406	4.8	3.6	0.13mm
2105-16	15.2	1.0	4.8	6.2	406	4.6	3.6	0.13mm
2105-17	15.2	1.5	4.8	6.7	406	4.6	3.6	0.13mm
2105-20	15.6	1.5	7.5	5.8	406	4.8	3.6	0.10mm
2105-21	6.2	1.5	7.1	1.6	407	4.8	3.6	0.15mm
2105-24	10.7	1.8	4.8	5.8	406	4.8	3.6	0.13mm
2105-25	10.7	1.0	4.8	3.1	406	4.8	3.6	0.13mm
2105-26	10.7	1.5	4.8	3.1	406	4.8	3.6	0.13mm
2105-27	10.7	2.4	4.8	3.1	406	4.8	3.6	0.13mm
2105-28	10.7	1.3	4.8	3.6	406	4.8	3.6	0.13mm


### CLIP-ON 2106

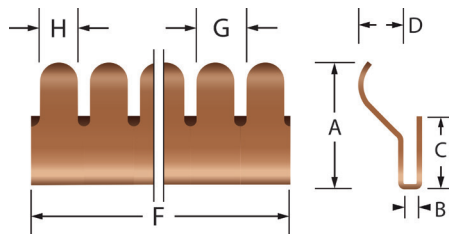

Part nr.	A	B	C	D	F	G	H	Material thickness
2106-01	15.4	1.0	7.4	5.3	406	4.8	3.6	0.1 mm
2106-02	15.4	1.5	6.9	5.3	406	4.8	3.6	0.1 mm
2106-03	15.4	2.0	7.1	5.3	406	4.8	3.6	0.1 mm
2106-04*	8.6	1.0	6.3	2.5	402	4.8	3.6	0.1 mm
2106-05*	8.6	1.5	5.8	2.5	402	4.8	3.6	0.1 mm
2106-06*	8.6	2.0	5.4	2.5	402	4.8	3.6	0.1 mm

\* with T-lance


### CLIP-ON 2107

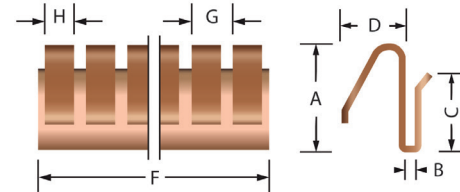

Part nr.	A	B	C	D	F	G	H	Material thickness
2107-01	4.6	1.0	3.8	2.3	307	3.2	2.8	0.08mm
2107-02	4.6	1.5	3.4	2.3	307	3.2	2.8	0.08mm
2107-03	12.3	1.0	8.3	7.2	406	4.8	3.2	0.15mm
2107-05	12.3	2.0	7.6	7.2	407	4.8	3.2	0.15mm
2107-06	12.3	3.0	6.3	7.2	407	4.8	3.2	0.15mm


## » CLIP-ON MOUNTING FINGERSTRIPS 2100

### CLIP-ON 2108

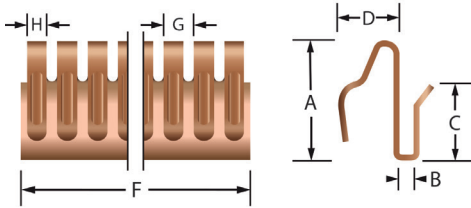


Part nr.	A	B	C	D	F	G	H	Material thickness
2108-01	6.1	1.0	5.3	2.8	406	1.5	1.0	0.08mm
2108-02	6.1	1.5	4.8	2.8	406	1.6	1.1	0.08mm
2108-06	9.4	1.0	6.9	5.1	408	2.4	1.6	0.15mm
2108-09	9.4	3.0	4.6	5.1	408	2.0	1.5	0.15mm

### CLIP-ON 2109

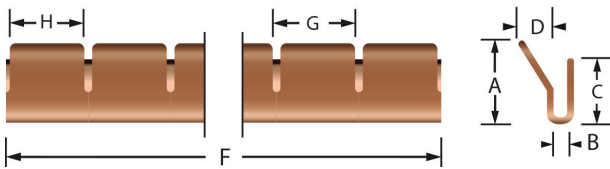


Part nr.	A	B	C	D	F	G	H	Material thickness
2109-02	4.8	1.0	2.8	1.3	306	4.2	3.8	0.08mm
2109-03	4.8	1.5	2.3	1.3	306	4.2	3.8	0.08mm

### CLIP-ON 2110

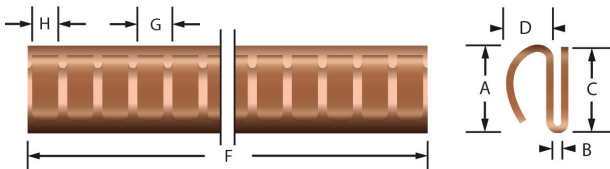


Part nr.	A	B	C	D	F	G	H	Material thickness
2110-01	10.5	1.55	8.2	6.5	402	4.75	3.2	0.13 mm
2110-02	10.5	1.55	8.1	6.5	405	9.5	7.95	0.13 mm
2110-03	10.5	1.55	7.4	6.5	405	4.75	3.2	0.13 mm

### CLIP-ON 2111

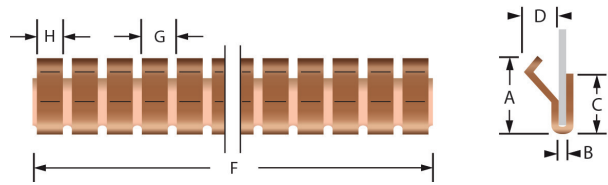

Part nr.	A	B	C	D	F	G	H	Material thickness
2111-01	8.4	0.8	6.5	4.2	407	4.6	3.6	0.13mm
2111-02	8.1	1.0	6.5	4.2	407	4.6	3.6	0.13mm
2111-03	8.2	1.5	6.5	4.2	407	4.6	3.6	0.13mm

### CLIP-ON 2112

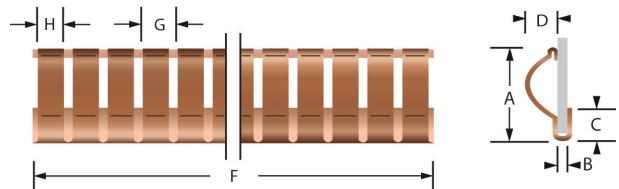

Part nr.	A	B	C	D	F	G	H	Material thickness
2112-01	10.5	0.8	5.7	3.0	409	6.3	5.7	0.06mm
2112-02	10.5	1.0	5.5	3.0	409	6.3	5.7	0.06mm
2112-03	10.5	1.5	5.3	3.0	409	6.3	5.7	0.06mm
2112-04	10.0	2.0	5.2	3.0	409	6.3	5.7	0.06mm
2112-05	16.3	1.5	5.6	5.4	455	9.5	8.5	0.10mm

### ORDER EXAMPLE

#### Part number

Specify the part number that you need from the table