



# CONDUCTIVE ALUMINIUM TAPE 3203

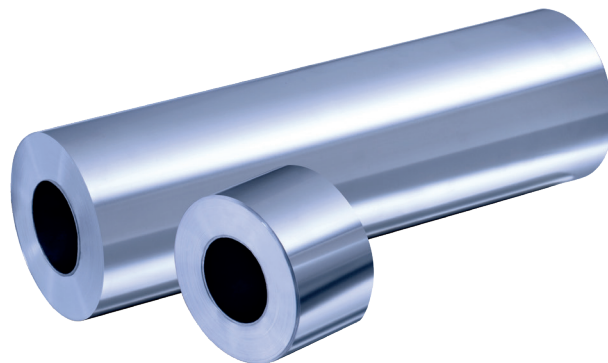

Conductive aluminium tape was developed especially for EMI/RFI shielding/screening in aluminum housings and frames to prevent galvanic corrosion.

We not only produce our aluminum tape on rolls, but also die-cut according to the customer's drawing on strips or in pieces (as stickers), both with or without self-adhesive.

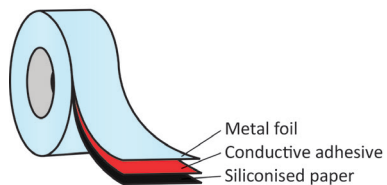

## TECHNICAL SPECIFICATION AND PART NUMBERS

Part number (with conductive adhesive)	3203
Part number (with standard adhesive)	3303
Construction	
Foil material	Aluminum
Surface	Shiny
Foil thickness	0.040mm
Total thickness	0.065mm
Adhesive	Synthetic conductive resin
Adhesive performance	4.5 N/cm
Tensile strength	25 N/cm
Temperature resistance	155 °C
El. resistance through adhesive	0.003 Ohm
Standard roll widths(mm)	10, 25, 50, 100 Other width on request
Roll length	Min. 16.5m (standard) Other roll length on request

These values are measured under laboratory conditions.  
In other situations results may differ. Please read our Guarantee.