



# Contact fingers 2700

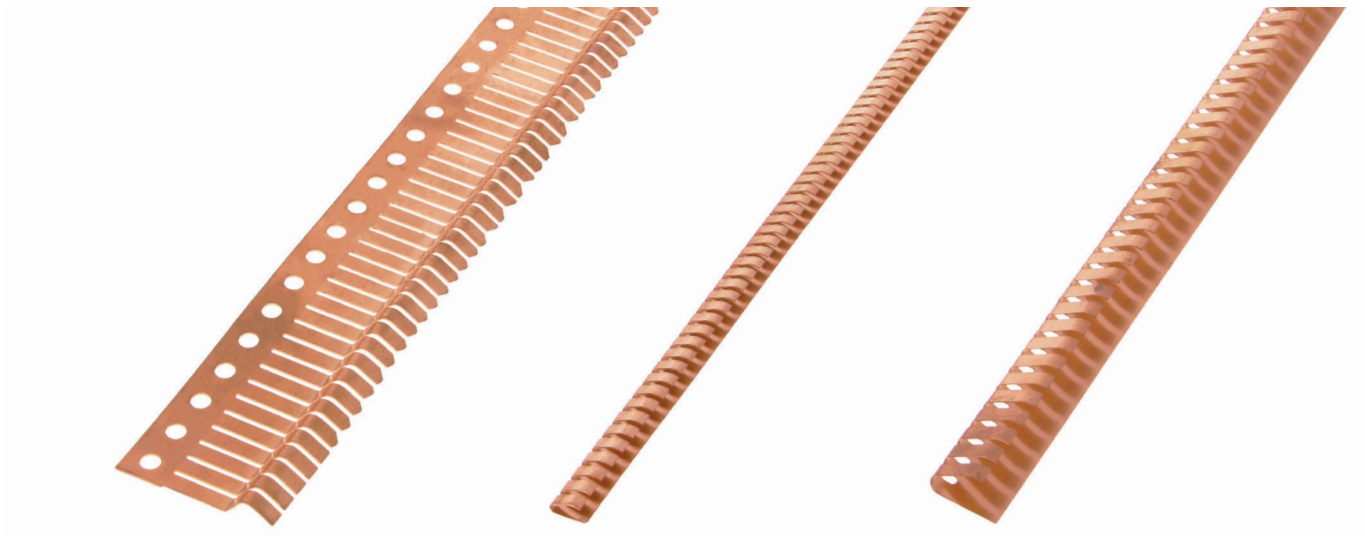

The Fingerstrips are very easy to bend and are therefore suitable for round and very dynamic contacts. These contact strips have a very dynamic spring range. The fingerstrips are made from beryllium copper.

## Contact fingers 2701

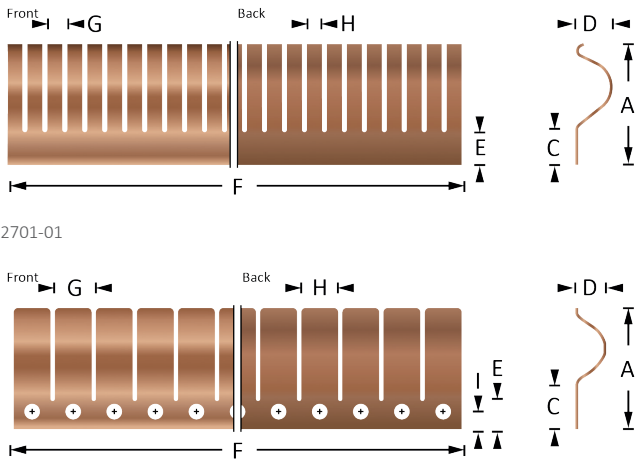


2701-01

2701-02 till 2701-04


Part nr.	A	C	D	E	F	G	H	I	∅	Material thickness
2701-01	24.1	7.0	7.1	6.5	499	4.0	3.0	-	3.6	0.20 mm
2701-02	27.8	10	6.5	6.8	503	9.5	8.5	4	3.6	0.13 mm
2701-02R	27.8	10	6.5	6.8	7600	9.5	8.5	4	3.6	0.13 mm
2701-03	40.2	9.0	10.9	8	507	12.7	11.7	4.8	3.6	0.18 mm
2701-04	42.4	-	10.4	7.9	507	12.7	11.7	4.8	3.6	0.18 mm 25% 24 kg/m 50% 45 kg/m
2701-04R	42.4	-	10.4	7.9	7620	12.7	11.7	4.8	3.6	0.18 mm 25% 24 kg/m 50% 45 kg/m

## Contact fingers 2702

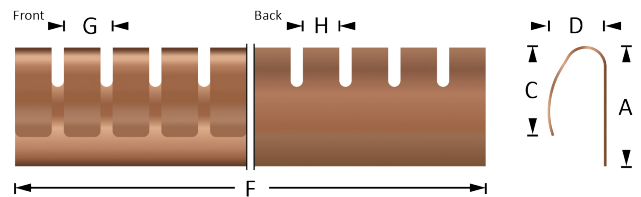

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2702-01	3.3	1.5	1.8	304	1.5	1.0	0.10 mm	25% 26 kg/m
50% 61 kg/m	3.3	2.5	2.3	406	3.2	2.0	0.12mm	25% 260 N/m 50% 720 N/m
2702-02	3.3	2.2	2.3	406	3.2	2.0	0.12 mm	25% 26 kg/m
50% 72 kg/m	7.1	4.8	5.1	406	3.4	2.3	0.25mm	25% 260 N/m 50% 2300 N/m
2702-03	7.1	6.4	3.3	406	3.4	2.3	0.25 mm	25% 6 kg/m 50% 143 kg/m
2702-05	7.1	4.8	5.1	406	3.4	2.3	0.25 mm	25% 26 kg/m 50% 230 kg/m
2702-06	9.7	7.3	4.8	499	4.1	3.1	0.20 mm	-
2702-08	16.0	10.4	11.2	406	3.4	2.2	0.25 mm	25% 24 kg/m 50% 68 kg/m


## Contact fingers 2704

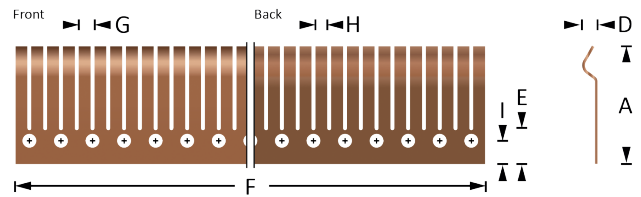


Part nr.	A	D	E	F	G	H	I	∅	Material thickness
2704-01	29.8	29.8	9	503	4.0	3.0	4.5	3.5	0.40 mm

## » Contact fingers 2700


### Contact fingers 2705

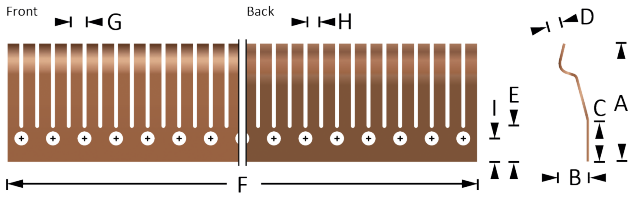

2705-01

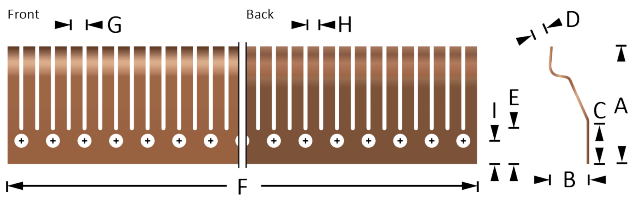


2705-02

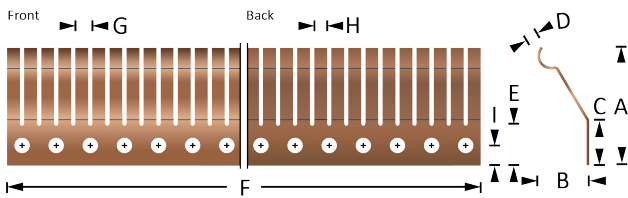

2705-03


Part nr.	A	B	C	D	E	F	G	H	I	∅	Material thickness
2705-01	29	7	10	3.2	9	503	4.0	3.0	4.5	3.5	0.40 mm
2705-02	27.9	9	10	3.2	9	503	4.0	3.0	4.5	3.5	0.40 mm
2705-03	26.7	11	10	3.2	9	503	4.0	3.0	4.5	3.5	0.40 mm

### Contact fingers 2706

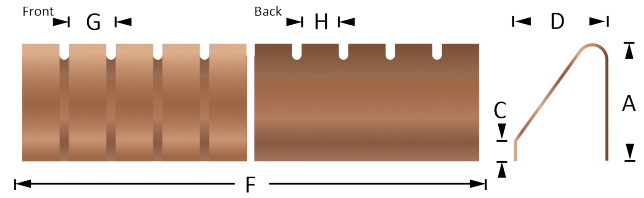


Part nr.	A	C	D	F	G	H	Material thickness
2706-01	12.5	2.0	10	499	4	3	0.15mm

### Contact fingers 2707

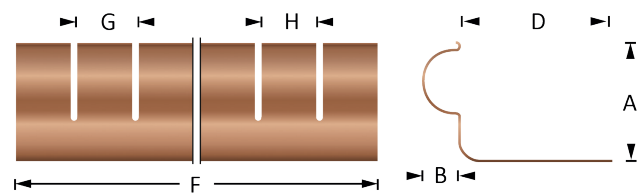

Part nr.	A	B	D	F	G	H	Material thickness	Compression force N
2707-01	18.3	5.6	23.9	406	9.5	8.7	0.10 mm	25% 250 N/m 50% 700 N/m

### Contact fingers 2708

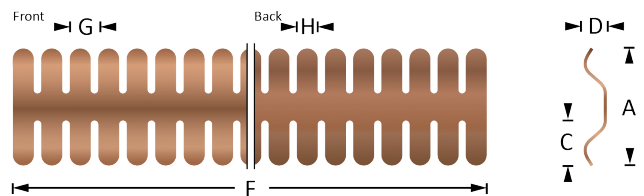

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2708-01	19.8	7.6	3	406	4.8	3.6	0.13 mm	25% 240 N/m 50% 1080 N/m

### Order example

Part number

Specify the part number that you need from the table

#### \*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.