



# CONTACT FINGERS 2700

Contact fingers for Faraday cage doors and lids for shielded enclosures

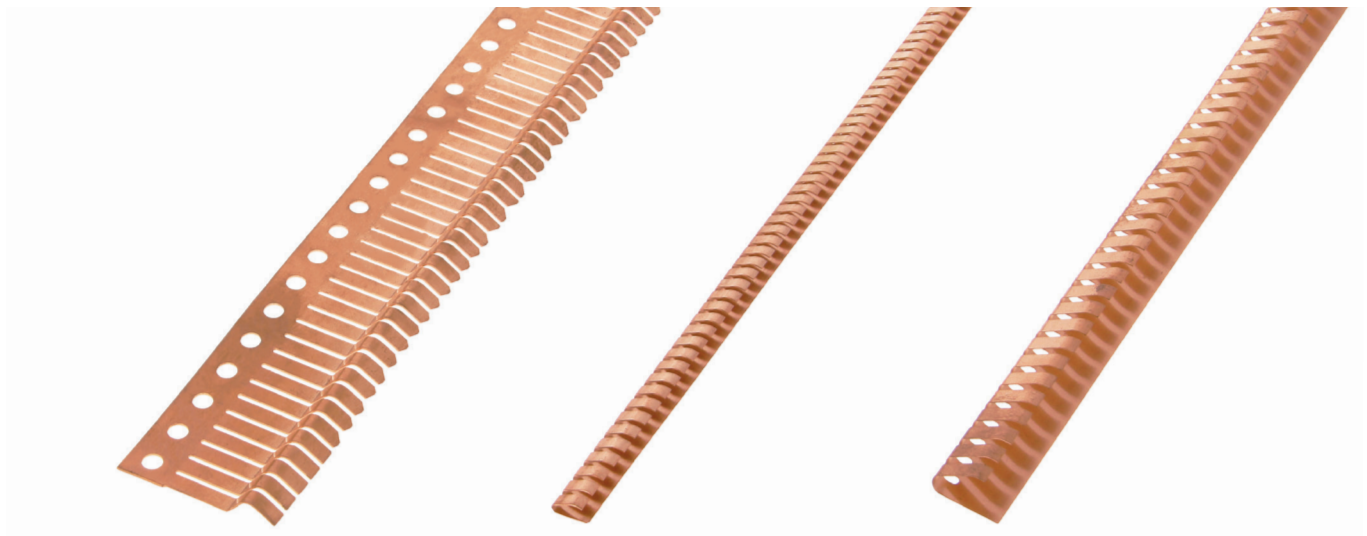


The Fingerstrips are very easy to bend and are therefore suitable for round and very dynamic contacts. These contact strips have a very dynamic spring range.

## CONTACT FINGERS 2701

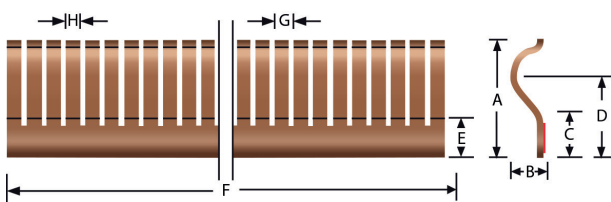

2701-01

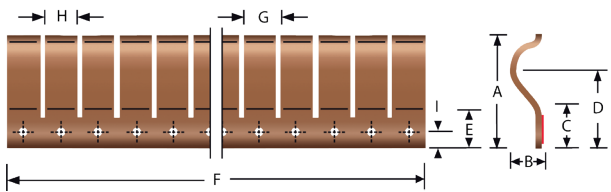


2701-02 till 2701-04

Part nr.	A	B	C	D	E	F	G	H	I	∅	Material thickness
2701-01	24.0	7.0	7.0	15.5	6.5	499	4.0	3.0	-	-	0.20mm
2701-02	27.7	6.6	6.4	17.0	6.4	504	9.5	8.7	4	3.6	0.13mm
2701-02R	27.7	6.6	6.4	17.0	6.4	7600	9.5	8.7	4	3.6	0.13mm
2701-03	40.2	10.9	6.7	27.0	7.9	508	12.7	11.7	4.8	3.6	0.18mm
2701-04	42.4	10.9	7.9	27.0	7.9	504	12.7	11.7	4.8	3.6	0.18mm
2701-04R	42.4	10.9	7.9	27.0	7.9	7620	12.7	11.7	4.8	3.6	0.18mm

Material: Beryllium copper


## CONTACT FINGERS 2702

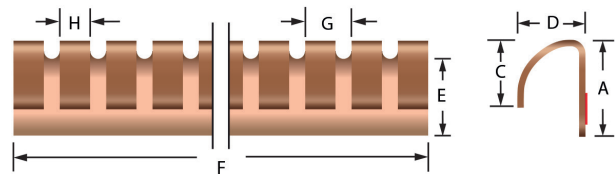

Part nr.	A	C	D	E	F	G	H	Material thickness	Compression force N
2702-01	3.3	2.5	1.8	2.1	304	1.5	1.0	0.10mm	25% 260 N/m 50% 610 N/m
2702-02	3.3	2.5	2.3	2.2	406	3.2	2.0	0.12mm	25% 260 N/m 50% 720 N/m
2702-03	7.1	6.4	3.3	5.7	406	3.4	2.3	0.25mm	25% 60 N/m 50% 1430 N/m
2702-05	7.1	4.8	5.1	5.9	406	3.4	2.3	0.25mm	25% 260 N/m 50% 2300 N/m
2702-08	16.0	10.4	11.2	12.7	406	3.4	2.2	0.25mm	25% 240 N/m 50% 680 N/m

Material: Beryllium copper

## CONTACT FINGERS 2703

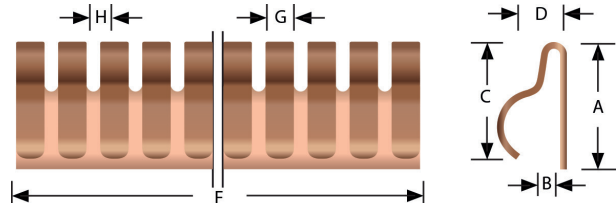


Part nr.	A	B	C	F	G	H	Material thickness
2703-01	4.2	2.6	4	406	1.5	1	0.10mm

Material: Beryllium copper



## » CONTACT FINGERS 2700


### CONTACT FINGERS 2704

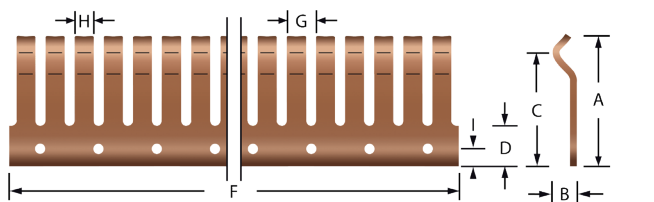


Part nr.	A	B	C	D	F	G	H	I	Ø	Material thickness
2704-01	30.0	3.2	25.0	9.0	503	4.0	3.0	4.5	3.5	0.40mm

Material: Beryllium copper


### CONTACT FINGERS 2705

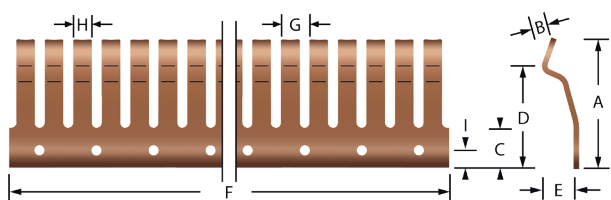

2705-01

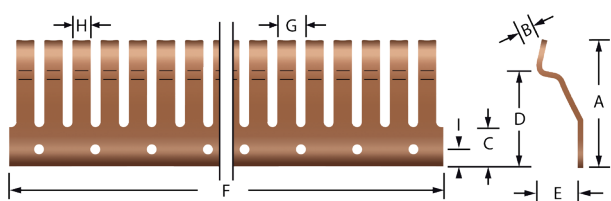

2705-02

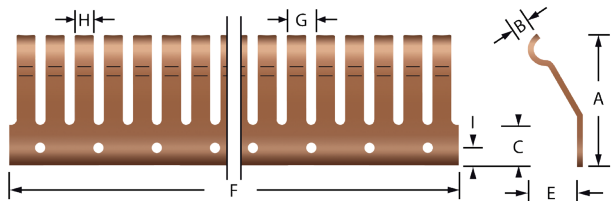


2705-03

Part nr.	A	B	C	D	E	F	G	H	I	Ø	Material thickness
2705-01	29.1	3.2	9.0	23.5	7.0	503	4.0	3.0	4.5	3.5	0.40mm
2705-02	27.8	3.2	9.0	22.5	9.0	503	4.0	3.0	4.5	3.5	0.40mm
2705-03	26.7	3.2	9.0	-	11.0	503	4.0	3.0	4.5	3.5	0.40mm

Material: Beryllium copper


### CONTACT FINGERS 2706

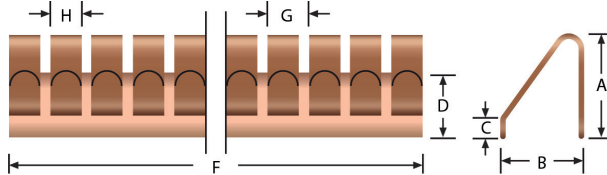

Part nr.	A	B	C	D	F	G	H	Material thickness
2706-01	12.5	9.9	2.0	5.5	500	2.0	1.5	0.15mm

Material: Beryllium copper


### CONTACT FINGERS 2707

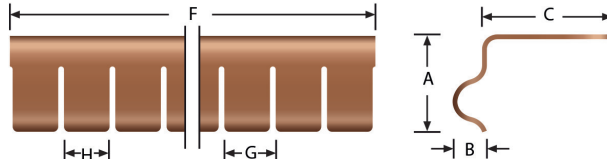

Part nr.	A	B	C	F	G	H	Material thickness	Compression force N
2707-01	18.3	5.6	23.9	406	9.5	8.7	0.10mm	25% 250 N/m 50% 700 N/m

Material: Beryllium copper

### CONTACT FINGERS 2708

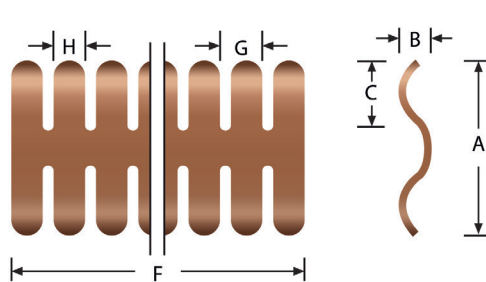

Part nr.	A	B	C	F	G	H	Material thickness	Compression force N
2708-01	19.8	3.0	7.6	406	4.8	3.6	0.13mm	25% 240 N/m 50% 1080 N/m

Material: Beryllium copper

## ORDER EXAMPLE

### Part number

Specify the part number that you need from the table

### \*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.