



Door fingers 2800

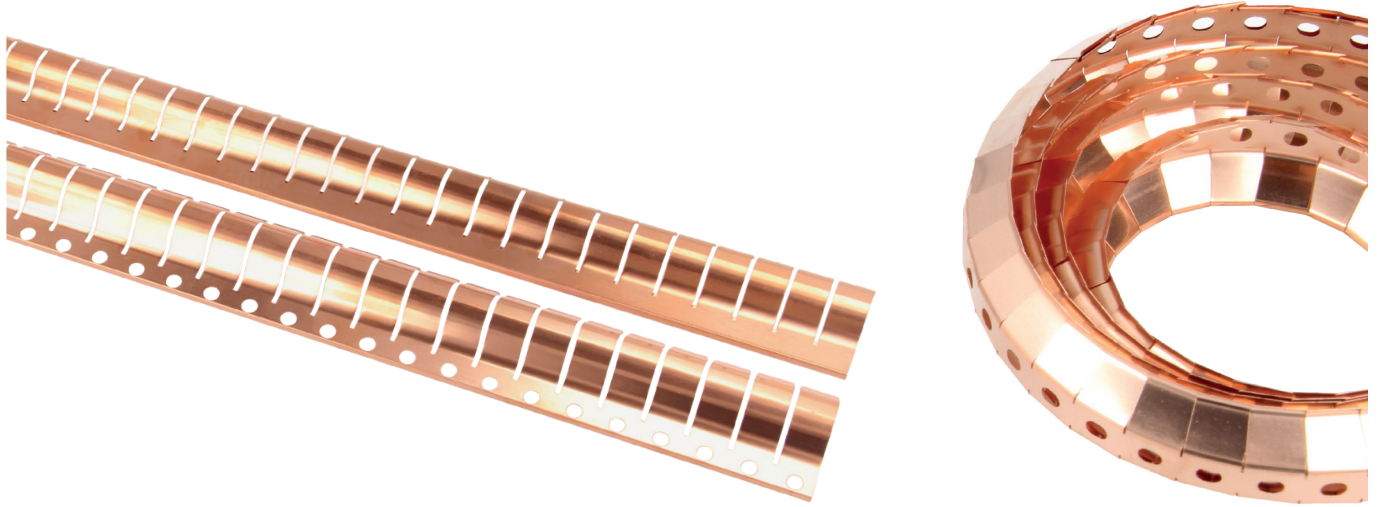

EMI Finger stock, fingerstrips & spring contacts for shielded Faraday cage doors, electrical conductive doors and lids. The fingerstrips are made from beryllium copper.


Contact fingers 2801 Rol TIN

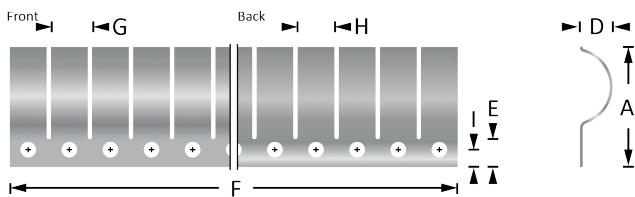

Part nr.	A	B	D	E	F	G	H	I	∅	Material thickness
2801-01R-TIN	27.7	6.9	9.5	6.4	10600 (on roll)	9.5	8.5	4.0	3.6	0.18 mm

Material beryllium copper with tin finish


Contact fingers 2801

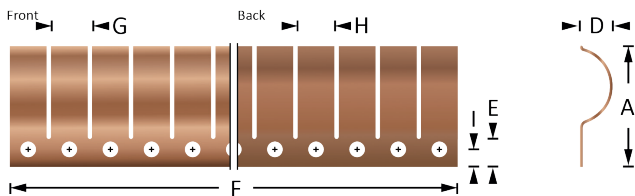

Part nr.	A	B	D	E	F	G	H	I	∅	Compression
2801-01	27.7	6.9	9.5	6.4	504	9.5	8.5	4.0	3.6	
2801-01R	27.7	6.9	9.5	6.4	10600 (on roll)	9.5	8.5	4.0	3.6	
2801-02	40.3	10.9	12.7	7.9	508	12.7	11.7	4.8	3.6	
2801-03	42.4	10.9	12.7	7.9	504	12.7	11.7	4.8	3.6	25% 24 kg/m 50% 46 kg/m
2801-03R	42.4	10.9	12.7	7.9	7620	12.7	11.7	4.8	3.6	25% 24 kg/m 50% 46 kg/m


Material thickness 0.18mm,

Contact fingers 2802

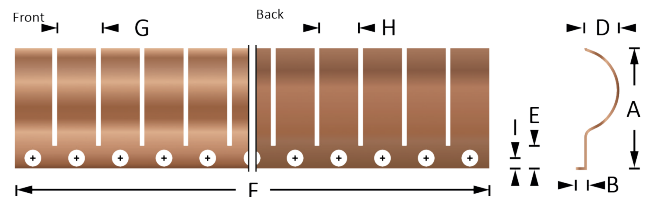


Part nr.	A	B	C	D	E	F	G	H	I	∅	Material thickness
2802-01	26	6.9	2.0	9.5	4.9	503	9.5	8.5	2.3	3.6	0.13 mm

Contact fingers 2803

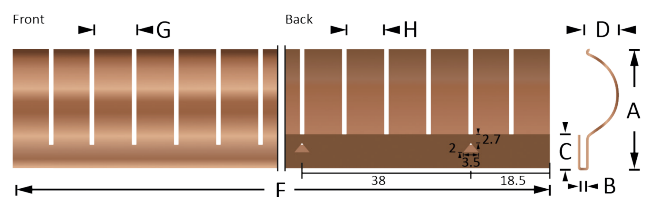

Part nr.	A	B	C	D	F	G	H	Material thickness
2803-01	26.8	6.9	2.0	7.8	494	9.5	8.5	0.13 mm

Contact fingers 2805

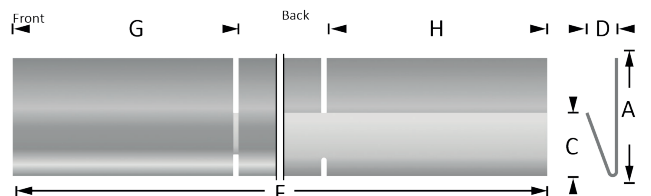

Part nr.	A	B	D	F	G	H	Material thickness
2805-01T	26.3	6.5	14.0	506	50.7	49.5	0.20 mm

Material: Tinned spring steel