


EMI HEAT SHRINKING TUBES KNITTED MESH 4996

For a tight seal with high shielding performance for cables and connectors

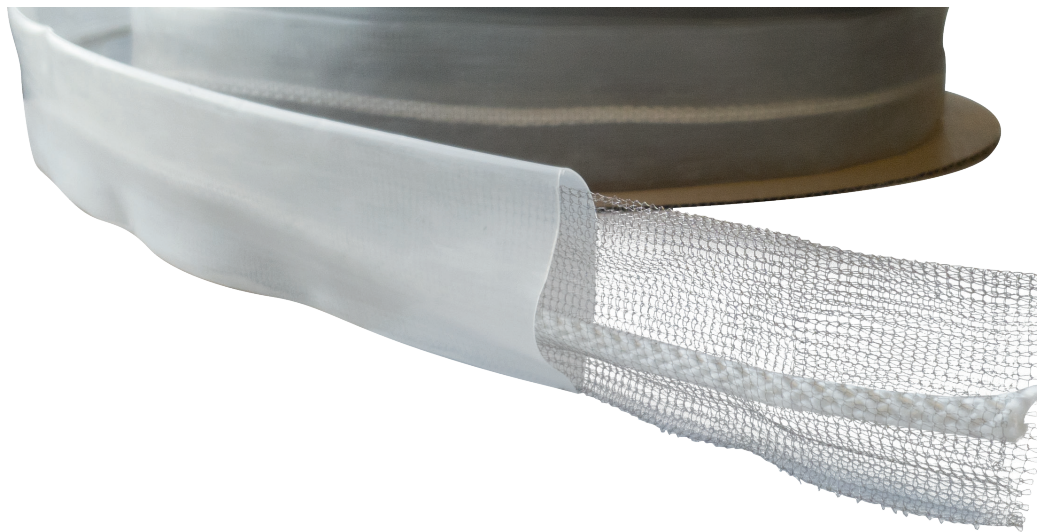

Our EMI heat shrinking tubes are made of polyolefin material with conductive textile on the inside to shield electromagnetic interference (EMI) effectively. The tubes are having excellent physical and electrical performance. The tubes can resist temperatures up to 135°C.

A rope is the standard inside of the sleeve to easily bring in the cable or bundle. When you want to add more cables afterwards, please take care that you add a spare rope.

Emi heat shrinking tubes are available in a wide range of diameters and can be made in different lengths with a maximum length of 15 meters.

PARTNUMBERS

Part number	Before shrinkage inner diameter mm	After shrinkage inner diameter mm (max.)	After shrinkage wall thickness mm (min.)
4996-6	6	2.0	0.7
4996-9	9	3.0	0.7
4996-12	12	4.0	0.7
4996-18	18	6.0	0.8
4996-24	24	8.0	1.0
4996-39	39	13.0	1.15

ADVANTAGES

- Very flexible
- Maximal length of 15 meters
- Shrink ratio: 3:1
- Continuous operating temperature of outer jacket: -55°C to 135°C
- High shielding performance
- Extremely strong
- Shrink temperature: >90°C

ORDER EXAMPLE

Series	Tube inner diameter (mm)	Length (mm)
4996	6 : 6 mm 9 : 9 mm 12 : 12 mm 18 : 18 mm 24 : 24 mm 39 : 39 mm	Please specify the length in mm (Max length 15000 mm)