

# FEEDTHROUGH FILTERS 8060

Used for EMI suppression of all electrical installations and equipment



Used for EMI suppression of all electrical installations and equipment. Shielding performance: 100dB @ 1M-40GHz (MIL-STD-285)

### TECHNOLOGY

- Self-healing plastic film non inductive capacitor
- Tinned metal case
- Feed through mounting
- Flame retardant V0

### MOUNTING

These filters are designed to be mounted directly in the entry panel of a Faraday cage or in an shielded filter housing. Please contact us for options.

### PRODUCT PART NUMBERS

Part number	IR (A)	Screw	Insertion loss (dB)	Rated voltage
8060-32	32	M6		
8060-63	63	M6	100dB, 1M-40GHz	250VAC/600VDC
8060-100	100	M8		


### TORQUE VALUE MAX.

- Ø M 27 : 40 Nm
- Ø M 32 : 40 Nm

### CONNECTION

Treaded terminals with nut:

- Ø M 4 : 1.2 Nm
- Ø M 6 : 2.45 Nm
- Ø M 8 : 10 Nm
- Ø M 10 : 15 Nm
- Ø M 12 : 20 Nm

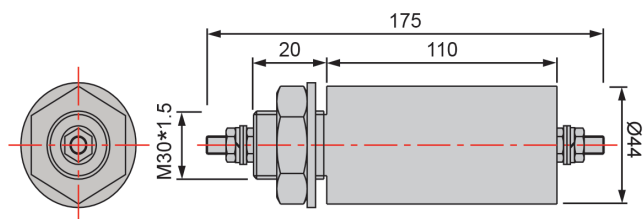

### 250VAC/60VDC ORDER EXAMPLE

Series	Rated current (A)
8060	32 : 32 ampere 63 : 63 ampere 100 : 100 ampere

