


Mu-copper tape 3200

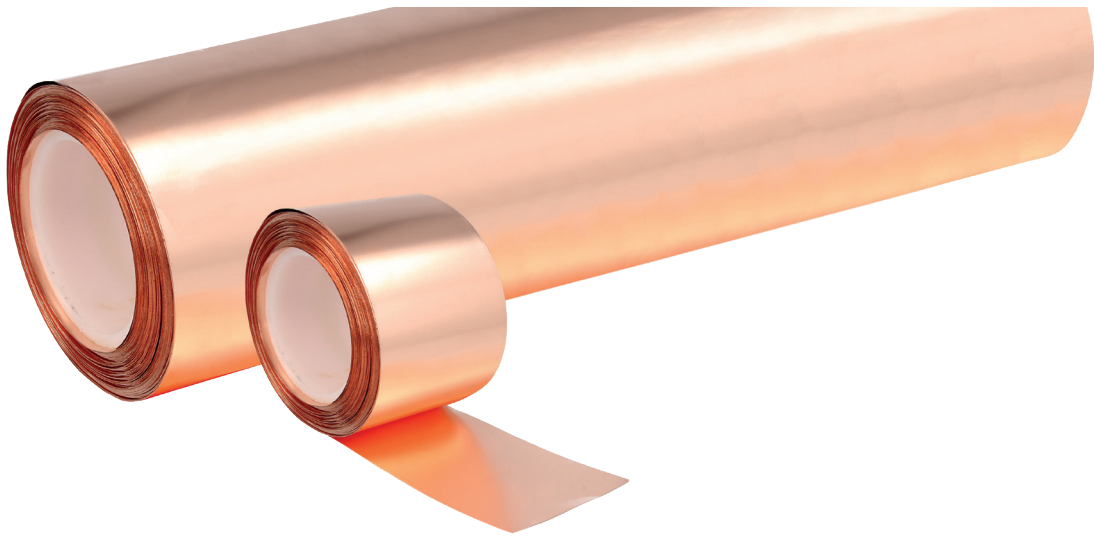

Many EMI problems can be solved easily with Mu-copper foil or tape. Mu-copper tape is available with or without (conductive) self-adhesive and an optional insulation layer. Mu-copper tape can be cut to any width starting at 3mm and can be delivered from stock. The most commonly used width is 25mm; standard roll length is 16.5 meters.

When large surfaces are to be shielded, it is recommended to cover most of the surface with Mu-copper foil, possibly in combination with tape with a conductive self-adhesive. This solution is much cheaper than covering the entire surface with tape strips.

Mu-copper tape can also be delivered as die-cut, according to your drawing, on strips or in pieces (as stickers), with optional self-adhesive. Almost every shape and size is possible.

Technical specification

Foil material	Soft copper
Surface	Shiny
Foil thickness	0.035 mm
Total thickness	0.060 mm
Adhesive	Synthetic conductive resin
Adhesive performance	4.5 N/cm
Tensile strength	55 N/cm
Temperature resistance	155 °C
El. resistance through adhesive	0.003 Ohms
Roll length	Min. 16.5m (standard)
Standard roll width (mm)	10, 25, 50, 100

*Other roll widths/lengths on request

Applications


- EMI shielding of plastic enclosure parts
- EMI shielding tape/gasket
- Shielding of all non-conductive materials
- Ground plane
- Anti-static floors (ESD floors)
- Electrical connection between surfaces
- Shielding in housings and Faraday cages
- Temporary shielding during tests
- Mounting transparent foils and windows for EMI/RFI shielding
- Cable shielding (tape wrapped around cable)
- Temporary shielding during emissions and immunity tests

Shielding effectiveness

There are many factors that influence the actual effectiveness of an EMI/RFI shielding tape after it has been applied, such as the type and thickness of foil, type of adhesive, closeness of contact, smoothness of application surface, strength and frequency of the EMI/RFI signal, etc. Still, attenuation values can be determined using standard tests and fixtures.

For EMI/RFI shielding tape, typical shielding effectiveness (far field) is in the range of 60dB to 80dB (10 kHz to 20 GHz). For more specifications see table and graph below.

3200 - Mu-copper tape vs other tapes

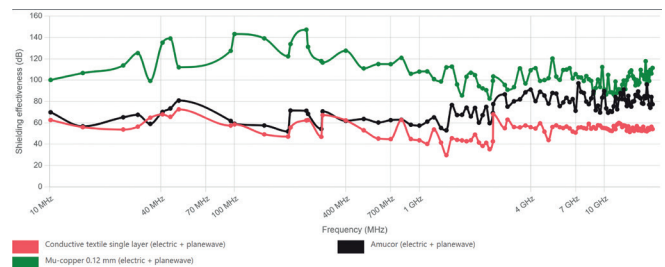


» Mu-copper tape 3200

Mu-copper tape with conductive adhesive

3201

Max. width 650 mm
Thickness 0.042 mm ±0.02


- Copper (0.035)
- Conductive adhesive
- Siliconised paper



3212

Max. width 1000 mm
Thickness 0.19 mm ±0.02


- Copper (0.12)
- Conductive adhesive
- Siliconised paper



3218

Max. width 1000 mm
Thickness 0.25 mm ±0.02


- Copper (0.18 mm)
- Conductive adhesive
- Siliconised paper



3202

Max. width 330 mm
Thickness 0.042 mm ±0.02


- Tin
- Copper (0.035 mm)
- Tin
- Conductive adhesive
- Siliconised paper



3206

Max. width 650 mm
Thickness 0.047 mm ±0.02


- Siliconised paper
- Conductive adhesive
- Copper (0.035 mm)
- Conductive adhesive
- Siliconised paper



3207

Max. width 650 mm
Thickness 0.050 mm ±0.02

- Paper
- Copper (0.035 mm)
- Conductive adhesive
- Siliconised paper




Mu-copper tape with standard adhesive

3301

Max. width 650 mm
Thickness 0.040 mm ±0.02


- Copper (0.035)
- Standard adhesive
- Siliconised paper



3302

Max. width 330 mm
Thickness 0.040 mm ±0.02

- Tin
- Copper (0.035 mm)
- Tin
- Standard adhesive
- Siliconised paper



Order example

Part number	Width (mm)	Length (meters)
Please choose a part number out of the table	Specify the width in mm. Standard roll widths 25, 50, 100. Other width on request	Specify the length in meters. Standard roll length 16.5 meter.

*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.