



MULTI LAYERED PERFORMANCE SHIELDED WINDOW 9750

Shielded window designed for the high EMI/RFI and low frequency shielding

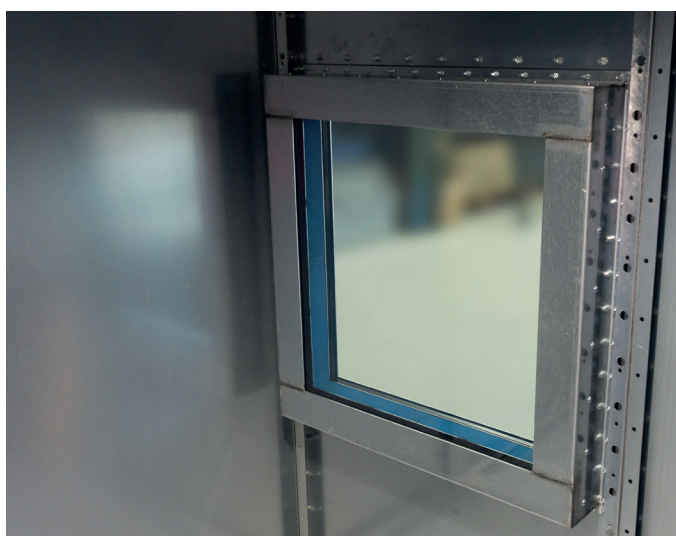

These faraday cage windows can be used where excellent visibility is needed without largely compromising the shielding capabilities of your secure environment. These windows can be used in control room of MRI room applications. These windows can be made to customer specifications to ensure all your needs are covered.

Shielding performance*

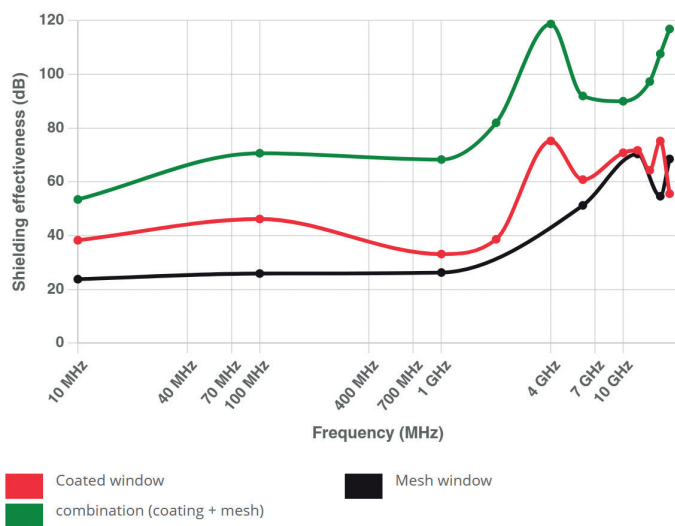

Features

- High Shielding performance
- Excellent Visibility
- Sturdy Exterior
- Can be made to customer specifications

ORDER EXAMPLE

Series	Width (mm)	Height (mm)
9750	Specify the width in mm including the frame. Max 2000 mm.	Specify the height in mm including the frame. Max 1200 mm.

*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.