



# STICK-ON MOUNTING FINGERSTRIP 2300

Stick-on mounting finger stock gaskets with pressure sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications and gaps from 0 to 3 mm

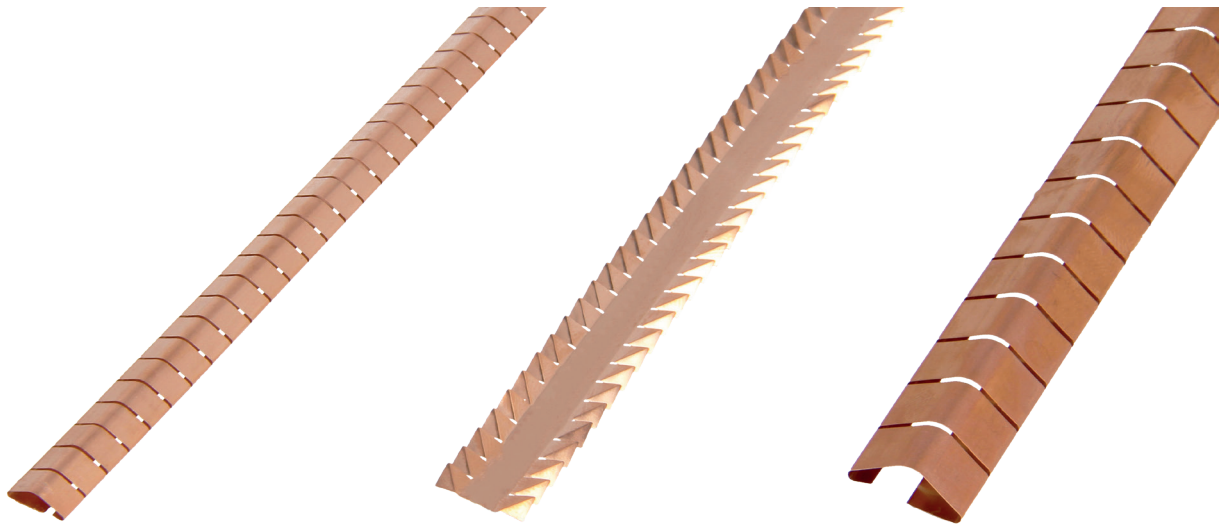


Stick-on mounting finger stock gaskets with pressure-sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications like rack mounting of line-cards in telecommunications equipment.



A red line indicates the self-adhesive strip.


These gaskets offer high EMI-shielding performance in applications where space may be limited. Stick-on mounting fingerstrips are low-compression, adhesive-mounted beryllium-copper shielding strips. The self-adhesive tape makes mounting easy and secure.

## STICK-ON 2301

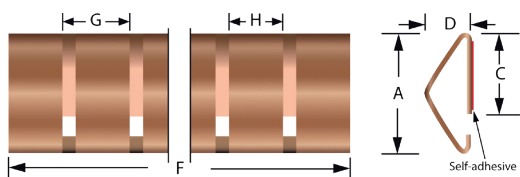


Part nr.	A	C	D	F	G	H	Material thickness
2301-01	7.1	4.6	2.8	610	4.8	4.3	0.05mm
2301-07	15.2	7.1	5.6	610	9.5	8.7	0.09mm
2301-08	19.8	11.2	8.1	457	8.8	8.7	0.10mm
2301-10	5.3	3.3	2.0	406	4.8	4.3	0.05mm
2301-11	15.2	7.2	5.7	455	9.5	8.7	0.10mm


## STICK-ON 2302

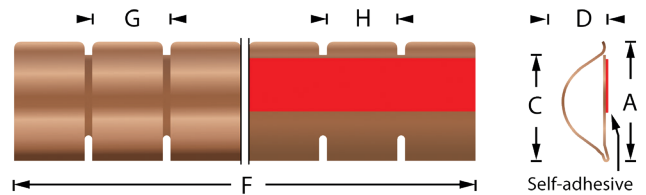

2302-01, 2302-03, 2302-04

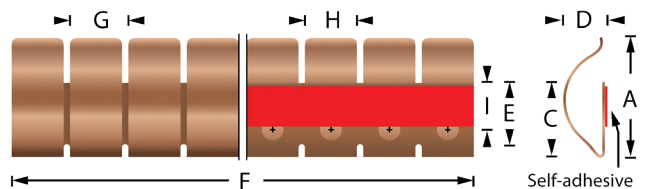

2302-05

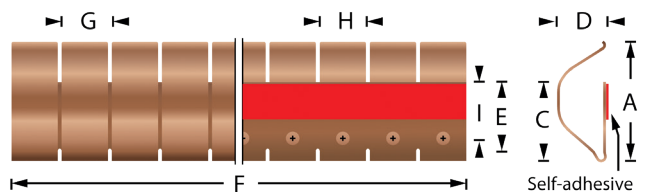


2302-06

Part nr.	A	C	D	E	F	G	H	I	Ø	Material thickness
2302-01	6.7	5.5	3.1	-	405.84	4.78	4.32	-	-	0.07mm
2302-03	9.0	7.5	4.0	-	406.48	6.36	5.8	-	-	0.08mm
2302-04	14.5	12.6	5.6	-	608.47	9.52	8.71	-	-	0.09mm
2302-04R	14.5	12.6	5.6	-	7620 (on rol)	9.52	8.71	-	-	0.09mm
2302-05	19.4	12.0	6.4	10	609.6	9.53	8.51	7.6	3.6	0.10mm
2302-06	29.0	19.90	12.0	17	303.78	12.7	11.68	14.3	3.6	0.18mm

## » STICK-ON MOUNTING FINGERSTRIP 2300

### STICK-ON 2305

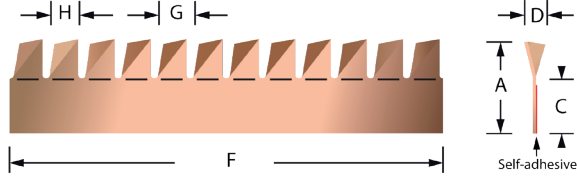

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2305-01	5.8	3.1	0.8	610	2.4	2.0	0.08mm	
2305-02	8.6	4.6	1.8	610	4.2	3.8	0.08mm	25%: 130 N/m 50%: 330 N/m
2305-03	12.7	6.4	3.0	610	6.4	6.0	0.08mm	25%: 70 N/m 50%: 150 N/m
2305-04	8.6	4.6	1.8	7600 (on roll)	4.2	3.8	0.08mm	25%: 130 N/m 50%: 330 N/m

### ORDER EXAMPLE

#### Part number

Specify the part number that you need from the table