



# STICK-ON MOUNTING FINGERSTRIP 2330


Stick-on mounting finger stock gaskets with pressure sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications and gaps from 3 to 6 mm

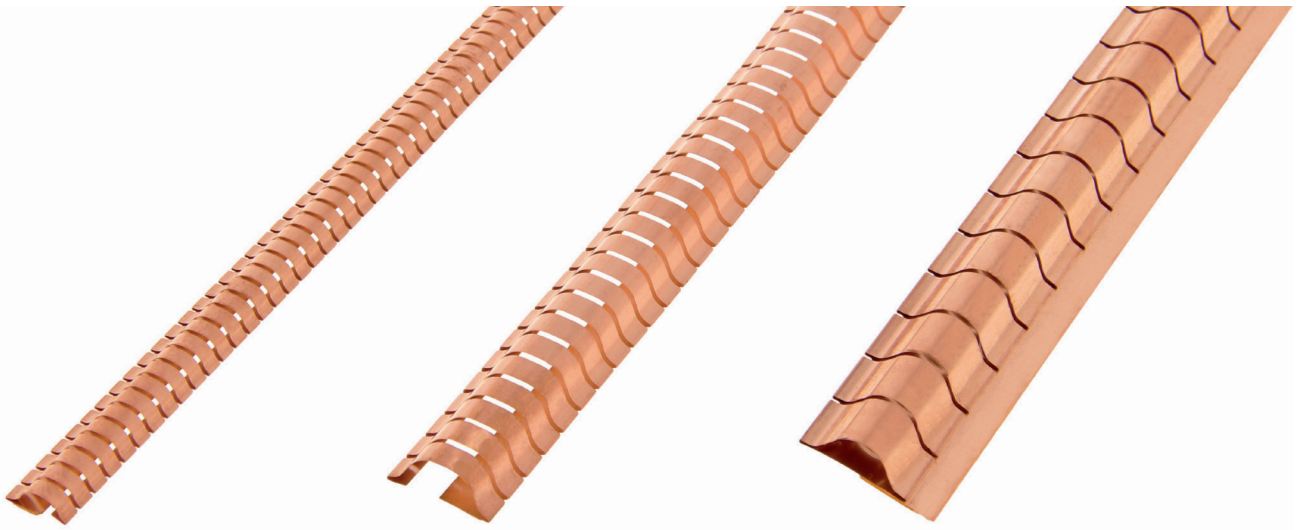

## STICK-ON 2332

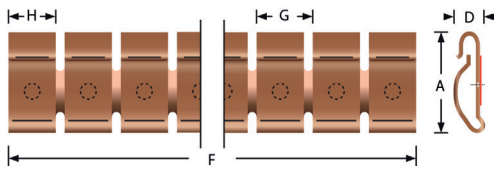


2332-02

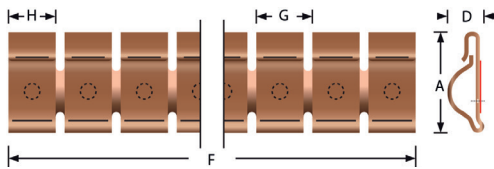

2332-05


Part nr.	A	D	F	G	H	Material thickness
2332-02	9.7	3.2	406	4.8	4.3	0.07mm
2332-05	19.3	5.8	609	9.5	8.8	0.10mm

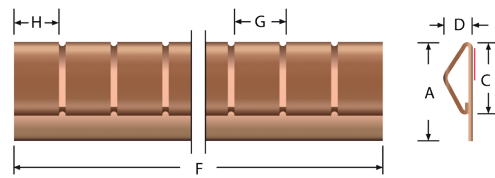

2335-02


Part nr.	A	C	D	F	G	H	Material thickness
2335-01	19.8	15.2	5.6	456	9.5	8.7	0.09mm
2335-02	12.7	9.4	3.3	406	6.35	5.72	0.05mm

## STICK-ON 2336

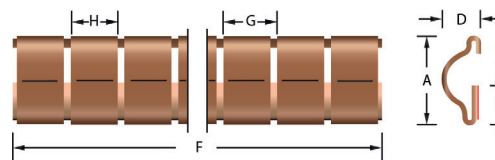


Part nr.	A	C	D	F	G	H	Material thickness
2336-04	15.2	7.4	5.6	457	9.5	8.7	0.09mm

## STICK-ON 2334

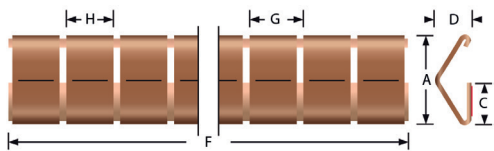


Part nr.	A	C	D	F	G	H	Material thickness
2334-01	8.1	5.3	2.8	408	4.8	4.3	0.05mm
2334-04	9.4	5.3	3.3	406	6.4	5.7	0.05mm

## STICK-ON 2338

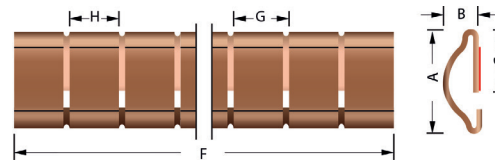

Part nr.	A	C	D	F	G	H	Material thickness
2338-01	8.1	4.8	2.5	406	4.0	3.5	0.10mm
2338-02	8.1	4.8	2.5	406	4.8	3.5	0.10mm
2338-03	9.4	4.8	3.3	406	6.4	5.7	0.10mm
2338-04	9.4	4.8	3.3	406	3.2	2.8	0.10mm
2338-05	15.3	4.8	5.6	457	9.5	8.7	0.10mm
2338-06	15.3	4.8	5.6	457	4.8	4.2	0.10mm

## STICK-ON 2335

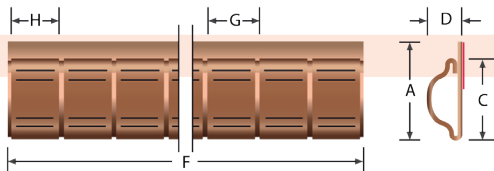

2335-01

Material: Beryllium copper