



STICK-ON MOUNTING FINGERSTRIP 2360

Stick-on fingerstrips for openings and gaps from 6 to 11 mm

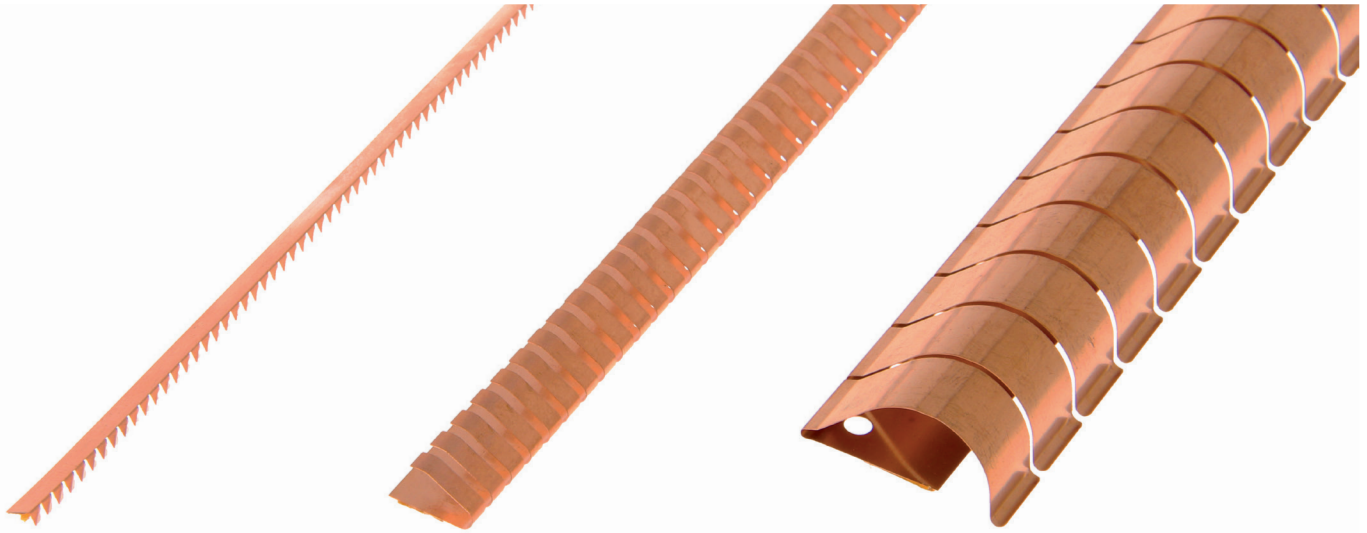



Stick-on mounting finger stock gaskets with pressure-sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications like rack mounting of line-cards in telecommunications equipment.



A red line indicates the self-adhesive strip.

These gaskets offer high EMI-shielding performance in applications where space may be limited. Stick-on mounting fingerstrips are low-compression, adhesive-mounted beryllium-copper shielding strips. The self-adhesive tape makes mounting easy and secure.


STICK-ON 2361

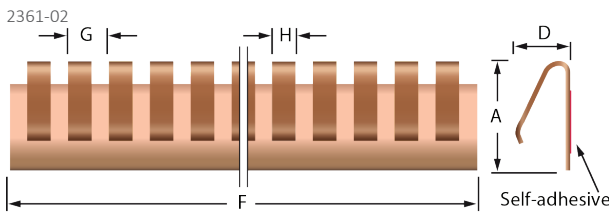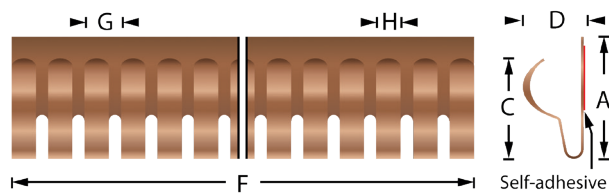

2361-04

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2361-02	5.0	4.0	2.4	499	1.5	1.0	0.10mm	25% 100 N/m 50% 150 N/m
2361-04	12.1	-	7.2	406	4.8	3.2	0.25mm	25% 30 kg/m 50% 90 kg/m

STICK-ON 2362

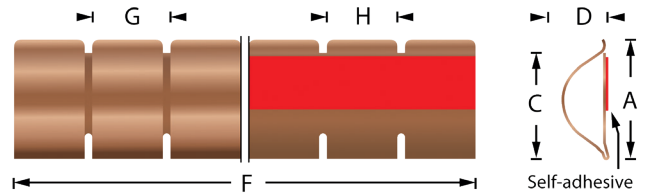


2362-01, 2362-01R, 2362-03, 2362-03R

Part nr.	A	C	D	F	G	H	Material thickness
2362-01	6.7	5.5	3.10	405.84	4.78	4.32	0.07mm
2362-01R	6.7	5.5	3.10	7620 (on roll)	4.78	4.32	0.07mm
2362-03	9.0	7.5	4.0	406,48	6.36	5.8	0.08mm
2362-03R	9.0	7.5	4.0	7620 (on roll)	6.36	5.8	0.08mm
2362-04	14.5	12.6	5.6	608.47	9.52	8.71	0.09mm
2362-04R	14.5	12.6	5.6	7620 (on roll)	9.52	8.71	0.09mm

» STICK-ON MOUNTING FINGERSTRIP 2360

STICK-ON 2364

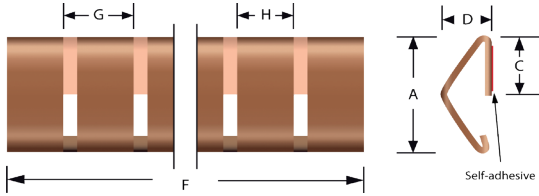


Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2364-01	15.2	7.2	5.7	608	9.5	8.7	0.09mm	25% 150 N/m 50% 300 N/m
2364-03	19.8	11.2	8.1	457	9.7	8.7	0.10mm	25% 150 N/m 50% 250 N/m
2364-04	27.9	19.8	10.4	456	12.7	11.7	0.10mm	25% 170 N/m 50% 350 N/m

ORDER EXAMPLE


Part number

Specify the part number that you need from the table

STICK-ON 2365

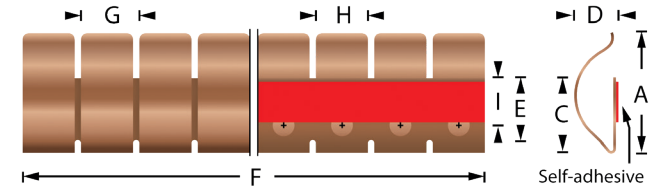

2365-01

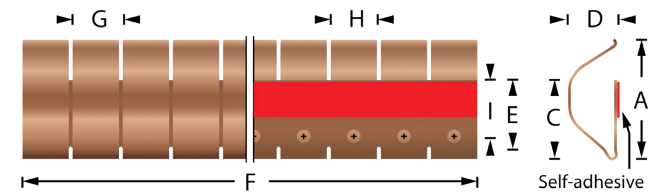

2365-03

Part nr.	A	C	D	E	F	G	H	I	∅	Material thickness
2365-01	19.4	12.0	6.4	10	609.6	9.53	8.51	7.6	3.6	0.10 mm
2365-03	29.0	19.90	12.0	17	303.78	12.7	11.68	14.3	3.6	0.18 mm