


# STICK-ON MOUNTING FINGERSTRIP 2360

Stick-on fingerstrips for openings  
and gaps from 6 to 11 mm



Stick-on mounting finger stock gaskets with pressure-sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications like rack mounting of line-cards in telecommunications equipment.


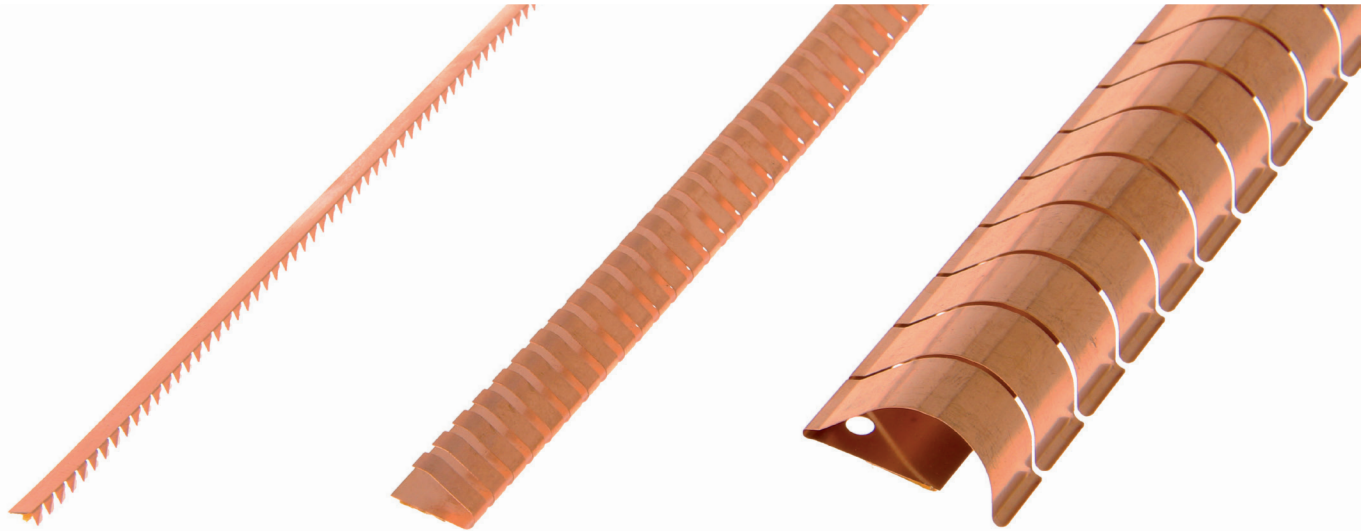


A red line indicates the self-adhesive strip.

These gaskets offer high EMI-shielding performance in applications where space may be limited. Stick-on mounting fingerstrips are low-compression, adhesive-mounted beryllium-copper shielding strips. The self-adhesive tape makes mounting easy and secure.



| Part nr. | A    | C | D   | F   | G   | H   | Material thickness | Compression force N        |
|----------|------|---|-----|-----|-----|-----|--------------------|----------------------------|
| 2361-02  | 4.8  | - | 2.3 | 406 | 1.5 | 1.0 | 0.10mm             | 25% 100 N/m<br>50% 150 N/m |
| 2361-03  | 3.3  | - | 2.3 | 406 | 3.2 | 2.0 | 0.13mm             | 25% 260 N/m<br>50% 720 N/m |
| 2361-04  | 12.1 | - | 7.2 | 406 | 4.8 | 3.2 | 0.25mm             | 25% 30 kg/m<br>50% 90 kg/m |

## STICK-ON 2362

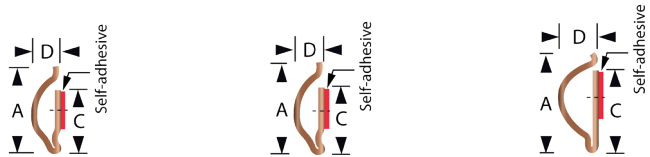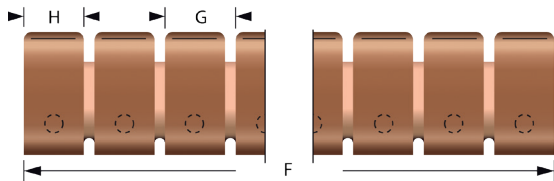

| Part nr. | A    | C    | D   | F              | G   | H   | Material thickness |
|----------|------|------|-----|----------------|-----|-----|--------------------|
| 2362-01  | 6.7  | 5.5  | 3.5 | 406            | 4.8 | 4.3 | 0.07mm             |
| 2362-01R | 6.7  | 5.5  | 3.5 | 7620 (on roll) | 4.7 | 4.2 | 0.07mm             |
| 2362-03  | 9.0  | 7.5  | 4.4 | 406            | 6.4 | 5.8 | 0.08mm             |
| 2362-03R | 9.0  | 7.5  | 4.4 | 7620 (on roll) | 6.4 | 5.8 | 0.08mm             |
| 2362-04  | 14.5 | 12.6 | 5.6 | 610            | 9.5 | 8.7 | 0.09mm             |
| 2362-04R | 14.5 | 12.6 | 5.6 | 7620 (on roll) | 9.5 | 8.7 | 0.09mm             |


## STICK-ON 2361

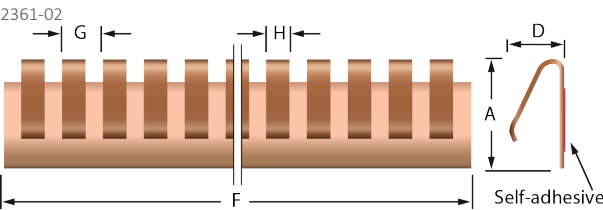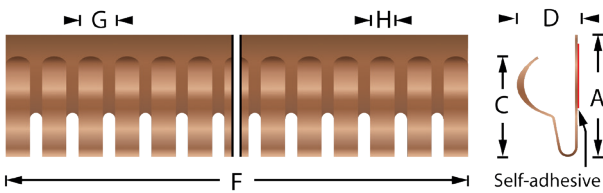

2361-04


## » STICK-ON MOUNTING FINGERSTRIP 2360

### STICK-ON 2364

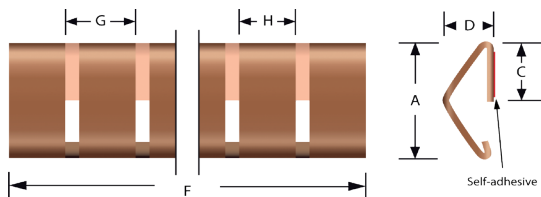

| Part nr. | A    | C    | D    | F   | G    | H    | Material thickness | Compression force N        |
|----------|------|------|------|-----|------|------|--------------------|----------------------------|
| 2364-01  | 15.2 | 7.2  | 5.7  | 608 | 9.5  | 8.7  | 0.09mm             | 25% 150 N/m<br>50% 300 N/m |
| 2364-03  | 19.8 | 11.2 | 8.1  | 457 | 9.7  | 8.7  | 0.10mm             | 25% 150 N/m<br>50% 250 N/m |
| 2364-04  | 27.9 | 19.8 | 10.4 | 456 | 12.7 | 11.7 | 0.10mm             | 25% 170 N/m<br>50% 350 N/m |

### STICK-ON 2365

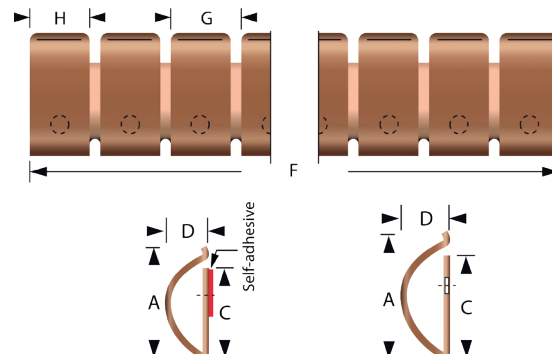

| Part nr. | A    | C    | D    | F   | G    | H    | Material thickness |
|----------|------|------|------|-----|------|------|--------------------|
| 2365-01  | 19.3 | 12   | 6.4  | 610 | 9.5  | 8.5  | 0.10mm             |
| 2365-03  | 29.7 | 17.8 | 12.3 | 304 | 12.7 | 11.7 | 0.18mm             |

## ORDER EXAMPLE

### Part number

Specify the part number that you need from the table