


STICK-ON MOUNTING FINGERSTRIP 2300


Stick-on mounting finger stock gaskets with pressure sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications and gaps from 0 to 3 mm

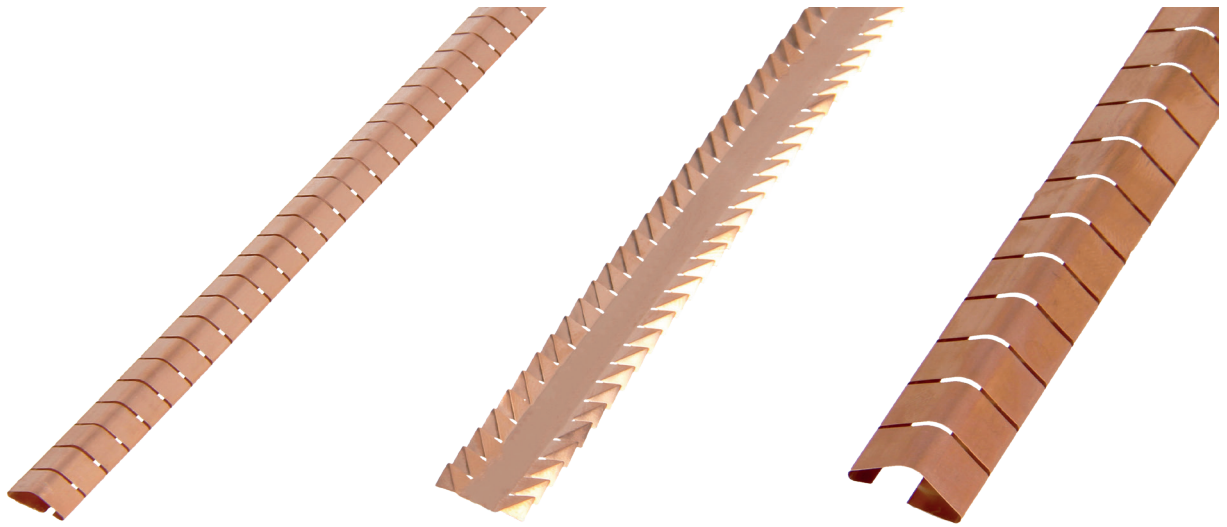

Stick-on mounting finger stock gaskets with pressure-sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications like rack mounting of line-cards in telecommunications equipment.

These gaskets offer high EMI-shielding performance in applications where space may be limited. Stick-on mounting fingerstrips are low-compression, adhesive-mounted beryllium-copper shielding strips. The self-adhesive tape makes mounting easy and secure.


STICK-ON 2301

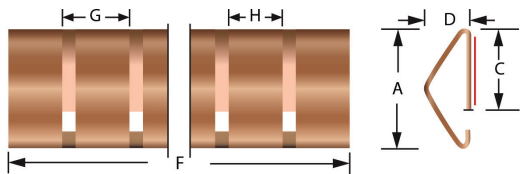

Part nr.	A	C	D	F	G	H	Material thickness
2301-01	7.1	4.6	2.8	610	4.8	4.3	0.05mm
2301-07	15.2	7.1	5.6	610	9.5	8.7	0.09mm
2301-08	19.8	11.2	8.1	457	8.8	8.7	0.10mm
2301-10	5.3	3.3	2.0	406	4.8	4.3	0.05mm
2301-11	15.2	7.2	5.7	455	9.5	8.7	0.10mm

Material: Beryllium-copper

STICK-ON 2302

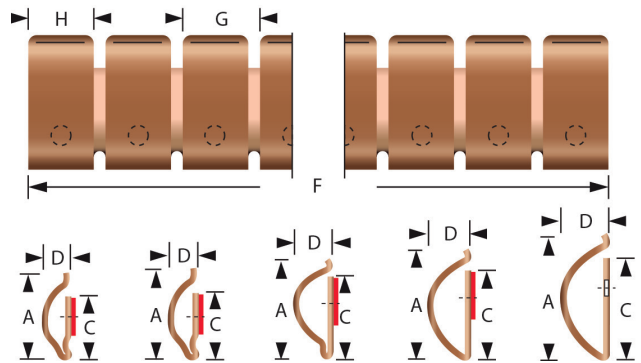


Part nr.	A	C	D	F	G	H	Material thickness
2302-01	6.7	5.5	3.5	406	4.8	4.3	0.07mm
2302-03	9.0	7.5	4.4	406	6.4	5.8	0.08mm
2302-04	14.5	12.6	5.6	610	9.5	8.7	0.09mm
2302-04-R	14.5	12.6	5.6	7620 (on rol)	9.5	8.7	0.09mm
2302-05	19.3	12	6.4	610	9.5	8.5	0.10mm
2302-06	29.7	17.8	12.3	304	12.7	11.7	0.18mm

Material: Beryllium copper

» STICK-ON MOUNTING FINGERSTRIP 2300


STICK-ON 2304

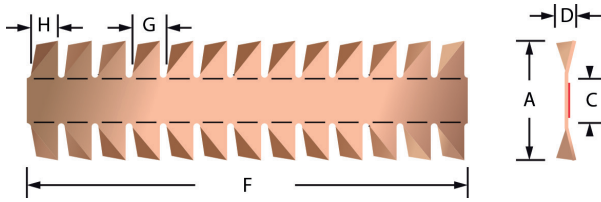

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2304-01	12.7	4.8	1.6	610	4.2	3.7	0.08mm	25%: 280 N/m 50%: 570 N/m
2304-03	12.7	4.8	1.6	7600 (on roll)	4.2	3.7	0.08mm	25%: 280 N/m 50%: 570 N/m

Material: Beryllium copper

STICK-ON 2305

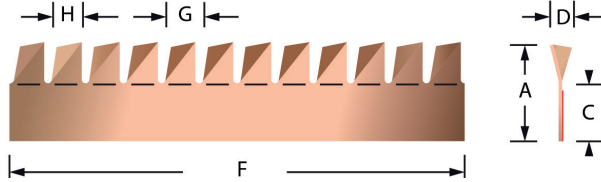

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2305-01	5.8	3.1	0.8	610	2.4	2.0	0.08mm	
2305-02	8.6	4.6	1.8	610	4.2	3.8	0.08mm	25%: 130 N/m 50%: 330 N/m
2305-03	12.7	6.4	3.0	610	6.4	6.0	0.08mm	25%: 70 N/m 50%: 150 N/m
2305-04	8.6	4.6	1.8	7600 (on roll)	4.2	3.8	0.08mm	25%: 130 N/m 50%: 330 N/m

Material: Beryllium copper

ORDER EXAMPLE

Part number	Adhesive
Specify the part number that you need from the table	1 : Standard adhesive 2 : Conductive self-adhesive 3 : No adhesive