



DOOR FINGERS 2800

Contact fingers for Faraday cage doors and lids for shielded enclosures

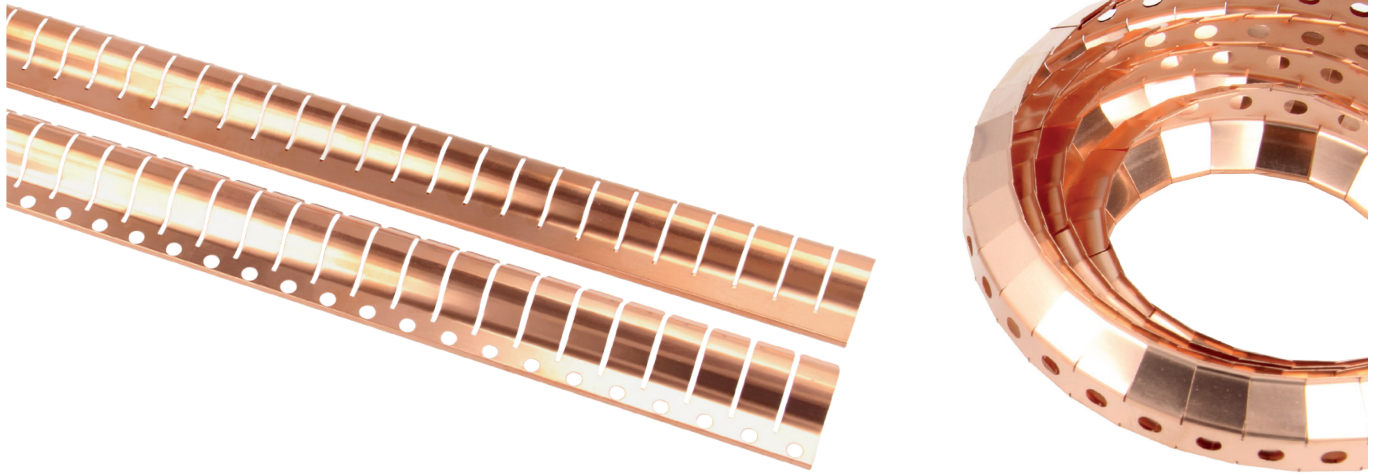

EMI Finger stock, fingerstrips & spring contacts for shielded Faraday cage doors, electrical conductive doors and lids.


CONTACT FINGERS 2801 ROL TIN

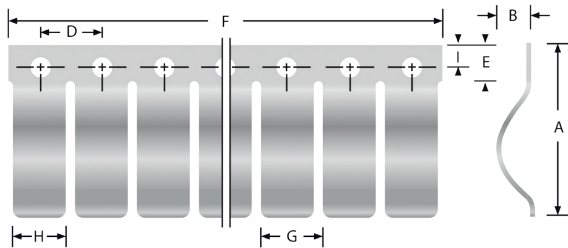

| Part nr. | A | B | D | E | F | G | H | I | Ø |
|--------------|------|-----|------|------|-------|------|------|------|------|
| 2801-01R-TIN | 27.7 | 6.6 | 9.53 | 6.35 | 10600 | 9.53 | 8.71 | 3.96 | 3.56 |

Material thickness 0.18mm, material beryllium copper with tin finish


CONTACT FINGERS 2801

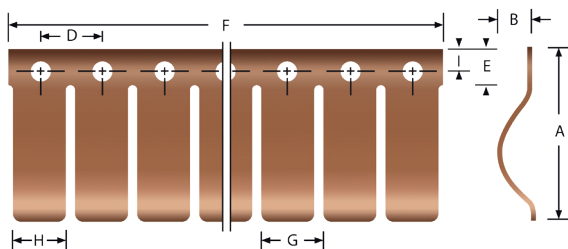

| Part nr. | A | B | D | E | F | G | H | I | Ø |
|----------|-------|-------|------|------|-------|------|-------|------|------|
| 2801-01 | 27.7 | 6.6 | 9.53 | 6.35 | 504 | 9.53 | 8.71 | 3.96 | 3.56 |
| 2801-01R | 27.7 | 6.6 | 9.53 | 6.35 | 10600 | 9.53 | 8.71 | 3.96 | 3.56 |
| 2801-02 | 40.2 | 10.9 | 12.7 | 8.0 | 507 | 12.7 | 11.7 | 4.8 | 3.6 |
| 2801-03 | 42.42 | 10.41 | 12.7 | 7.87 | 504 | 12.7 | 11.68 | 4.83 | 3.56 |
| 2801-03R | 42.42 | 10.41 | 12.7 | 7.87 | 7620 | 12.7 | 11.68 | 4.83 | 3.56 |

Material thickness 0.18mm, material beryllium copper


CONTACT FINGERS 2802

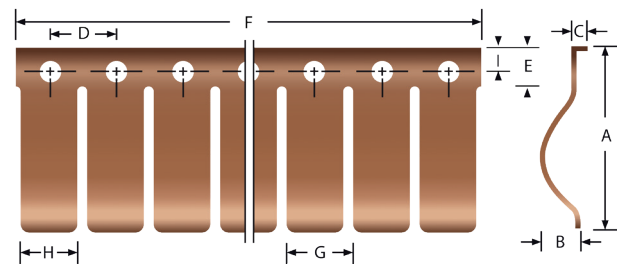

| Part nr. | A | B | C | Ø | D | F | G | H | Material thickness |
|----------|----|-----|-----|-----|-----|-----|-----|-----|--------------------|
| 2802-01 | 26 | 6.5 | 2.0 | 3.6 | 9.5 | 502 | 9.5 | 8.5 | 0.13mm |

Material: Beryllium copper

CONTACT FINGERS 2803

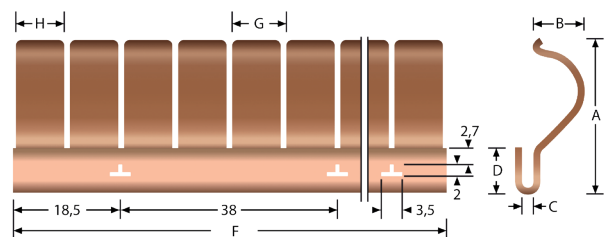

| Part nr. | A | B | C | D | F | G | H | Material thickness |
|----------|------|-----|-----|-----|-----|-----|-----|--------------------|
| 2803-01 | 27.0 | 6.9 | 2.0 | 7.8 | 494 | 9.5 | 8.5 | 0.13mm |

Material: Beryllium copper

ORDER EXAMPLE

Part number

Specify the part number that you need from the table